

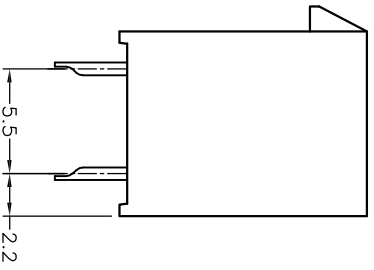
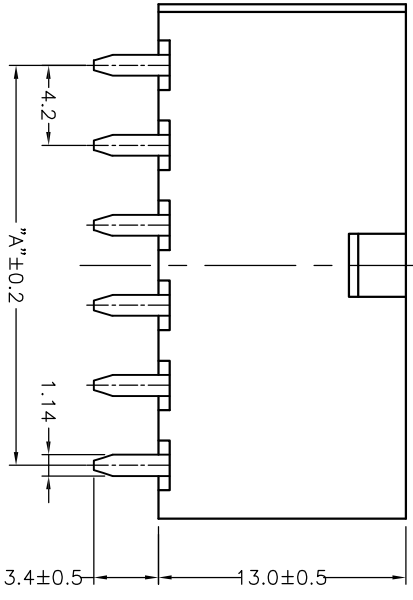



Poles	DIM.A	DIM.B
2x1P	—	5.6
2x2P	4.2	9.8
2x3P	8.4	14.0
2x4P	12.6	18.2
2x5P	16.8	22.4
2x6P	21.0	26.6
2x7P	25.2	30.8
2x8P	29.4	35.0
2x9P	33.6	39.2
2x10P	37.8	43.4
2x11P	42.0	47.6
2x12P	46.2	51.8

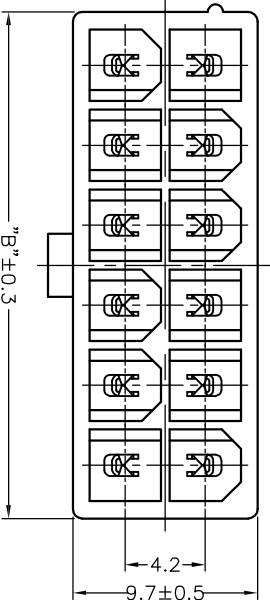


CIRCUIT SIZE LAYOUT

- 技术参数 SPECIFICATIONS
- ◆ 适用线规: AWG#28~#16
 - ◆ Applicable Wire: AWG#28~#16
 - ◆ 额定电压: 600V DC/AC(rms)
 - ◆ Rated voltage: 600V DC/AC(rms)
 - ◆ 额定电流: 7A (AWG #16)
 - ◆ Rated Current: 7A (AWG #16)
 - ◆ 耐压值: 1500V AC/minute
 - ◆ Withstand voltage: 1500V AC/min.
 - ◆ 工作温度: -40℃ ~ +105℃
 - ◆ Working Temp : -40℃ ~ +105℃
 - ◆ 绝缘电阻: ≥1000 MΩ
 - ◆ Insulation resistance: ≥1000 MΩ
 - ◆ 接触电阻: ≤10 mΩ
 - ◆ Contact resistance: ≤10 mΩ
- 材料 MATERIAL
- ◆ 绝缘体: 尼龙66, UL94-V2
 - ◆ Insulator: PA66, UL94-V2
 - ◆ 接触针: 黄铜
 - ◆ Contact PIN: Brass

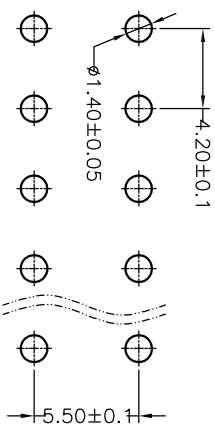

RECOMMENDED P.C.B. LAYOUT

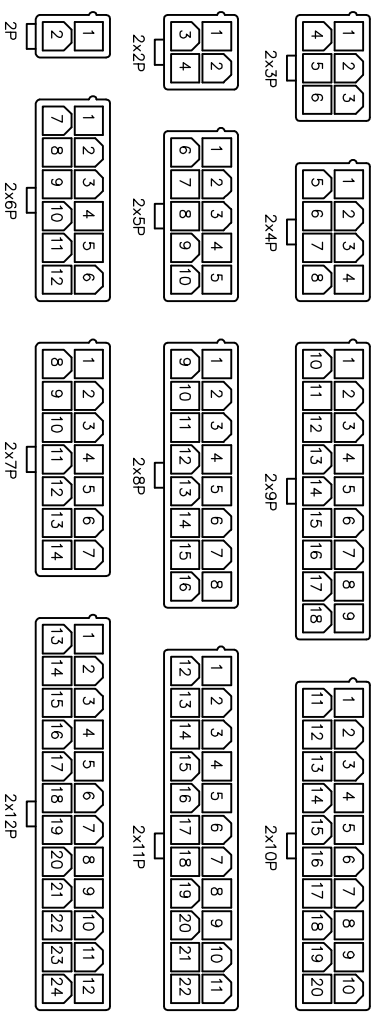

APPROVALS		DATE	
DRAWN	ZHIWEI.CHEN	2015.07.07	
CHECKED		TITLE:	
APPROVALS		PART NO.	
TOLERANCES ARE		SCALE: 1:1	
30°±0.1		PROJ.	
10°~30		UNIT: mm	
5°~10		DRAWING NO.	
~ 5		SHEET 1 OF 1	

NEW

DESCRIPTION.

CHANGE.

CHECK.

APPRO.

ECN NO.

REV.

DATE.

GEPU 歌普