

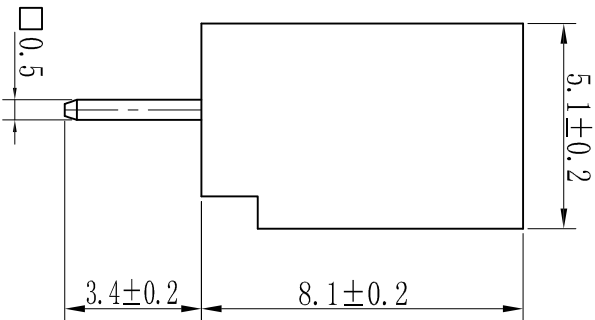
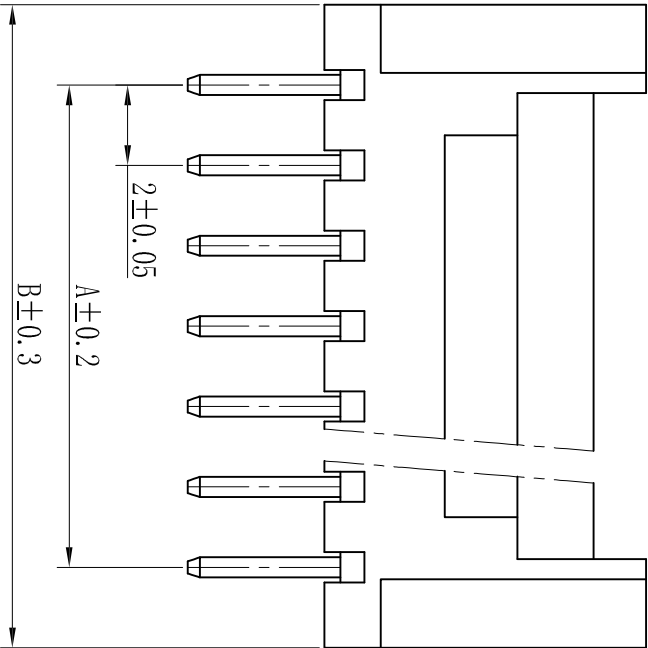


partno	A	B
2P	2.0	6.0
3P	4.0	8.0
4P	6.0	10.0
5P	8.0	12.0
6P	10.0	14.0
7P	12.0	16.0
8P	14.0	18.0
9P	16.0	20.0
10P	18.0	22.0
11P	20.0	24.0
12P	22.0	26.0
13P	24.0	28.0
14P	26.0	30.0
15P	28.0	32.0
16P	30.0	34.0

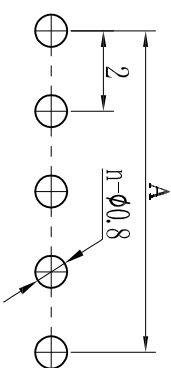

■ 技术参数 (SPECIFICATIONS)

- ◆ 额定电压: 100V AC DC
- ◆ Voltage rating: 100V AC DC
- ◆ 额定电流: 1.0A AC DC MIN
- ◆ Current rating: 1.0A AC DC MIN
- ◆ 耐压值: 800V AC/minute
- ◆ Withstand voltage: 800V AC/minute
- ◆ 绝缘电阻: 800MΩ MIN
- ◆ Insulation resistance: 800MΩ MIN
- ◆ 接触电阻: 0.02Ω MAX
- ◆ Contact resistance: 0.02Ω MAX
- ◆ 工作温度: -25℃ ~ +85℃
- ◆ Working Temperature: -25℃ ~ +85℃
- ◆ 间距: 2.0mm
- ◆ Pitch: 2.0mm
- 材料 (MATERIAL)
- ◆ 外壳: 尼龙66
- ◆ Housing: PA66
- ◆ 插针: 黄铜
- ◆ Pin: Brass

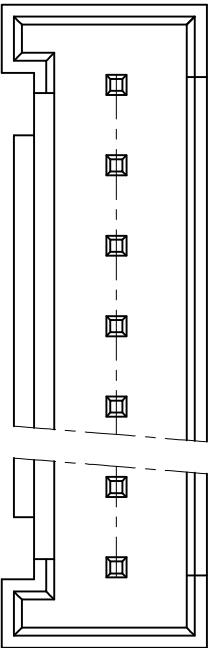

PCB安装尺寸图

APPROVALS				DATE		GEPU 歌普		
DRAWN		ZHIWEI.CHEN		2015.07.07				
CHECKED						TITLE:		
APPROVALS						PART NO. GP01-2002WV-NP		
TOLERANCES ARE		30~0.1		±0.30		ANGLE		UNIT: mm
		10~30		±0.20				SCALE: 1:1
		5~10		±0.15				PROJ. 
		~ 5		±0.10				SHEET 1 OF 1
NEW								
DESCRIPTION.								
CHANGE.								
CHECK.								
APPRO.								
ECN NO.								
REV.								
DATE.								

GEPU 歌普