
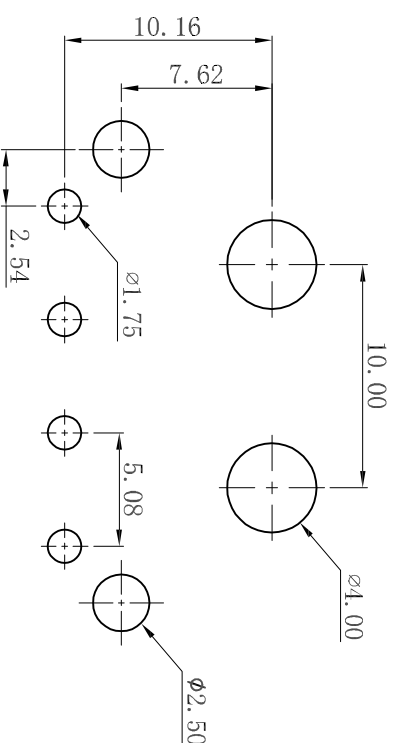
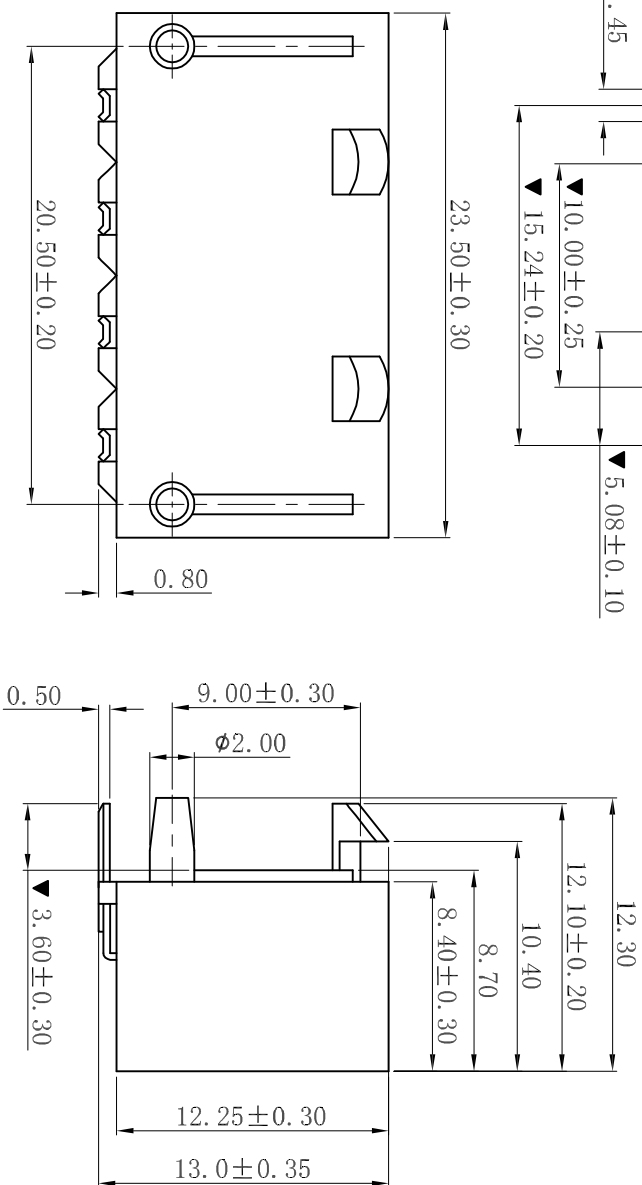
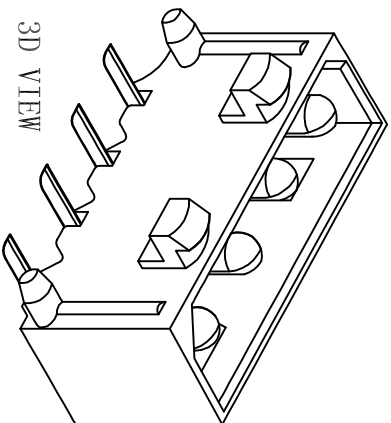


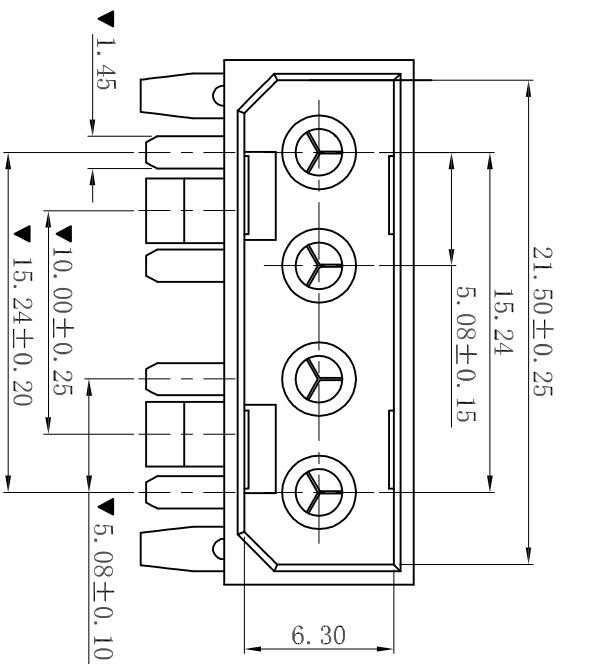

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

WAFER

- Part No. : 5082WR-04P
- Housing Material: Nylon66 UL94V-2
- Pin Material: Brass
- Contact Area Plating: Over Tin 70u” Plating, Over Nickel 30u” Plating.

- The Dimension Marked “▼” Must Be Recorded

P. C. B LAYOUT
TOLERANCE: ±0.05mm

APPROVALS		DATE	GEPU 歌普		
DRAWN	ZHIWEI.CHEN	2015.07.07			
CHECKED			TITLE: 5.08mm 90°		
APPROVALS			PART NO.	GP01-5082WR-4P	
TOLERANCES ARE			ANGLE	SCALE: 1:1	PROJ
30~0.1					
10~30					
5~10					
~5					
			UNIT: mm		
			DRAWING NO.		SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.		
	A		NEW		