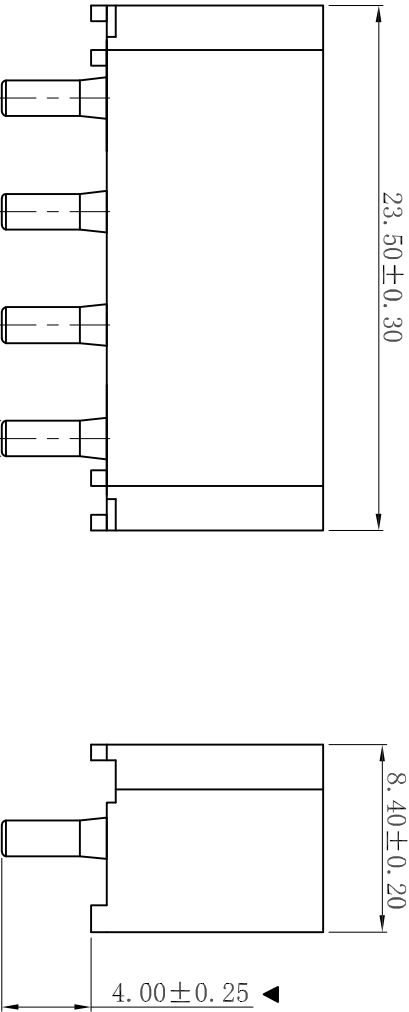
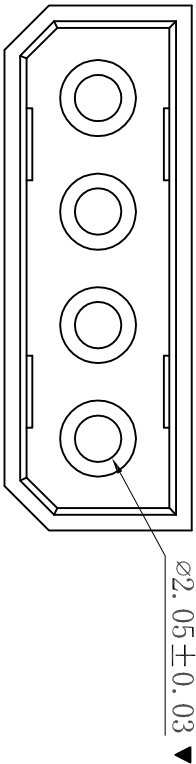



P.C.B LAYOUT: TOP VIEW
TOLERANCE: $\pm 0.05\text{mm}$

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: $1000M\Omega$ min
- Temperature range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- Contact resistance: $20m\Omega$ max

■ WAFER

- Part No. : 5082WV-04P-2
- Housing Material: PA66 UL94V-2 or UL94V-0
- Pin Material: Brass
- Contact Area Plating: Gold-Flash
- The Dimension Marked “▼” Must Be Recorded

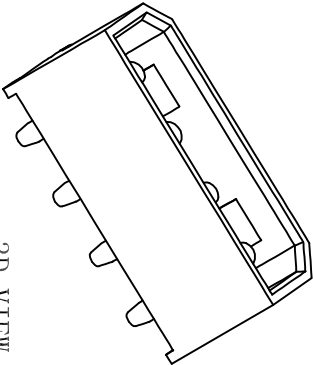

3D VIEW

			APPROVALS		DATE		GEPU歌普					
			DRAWN		ZHIWEI.CHEN		2015.07.07		TITLE: 5.08mm 180° 夹心			
			CHECKED						PART NO. GP01-5082WV-4P-2			
			APPROVALS						SCALE: 1:1 PROJ 			
									SHEET 1 OF 1			