



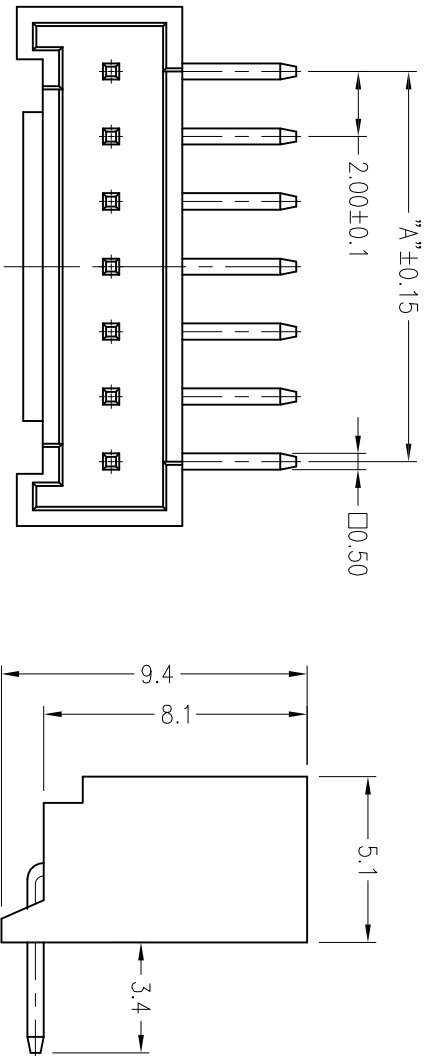

Poles	DIM.A	DIM.B
2P	2.0	6.0
3P	4.0	8.0
4P	6.0	10.0
5P	8.0	12.0
6P	10.0	14.0
7P	12.0	16.0
8P	14.0	18.0
9P	16.0	20.0
10P	18.0	22.0
11P	20.0	24.0
12P	22.0	26.0
13P	24.0	28.0
14P	26.0	30.0
15P	28.0	32.0
16P	30.0	34.0

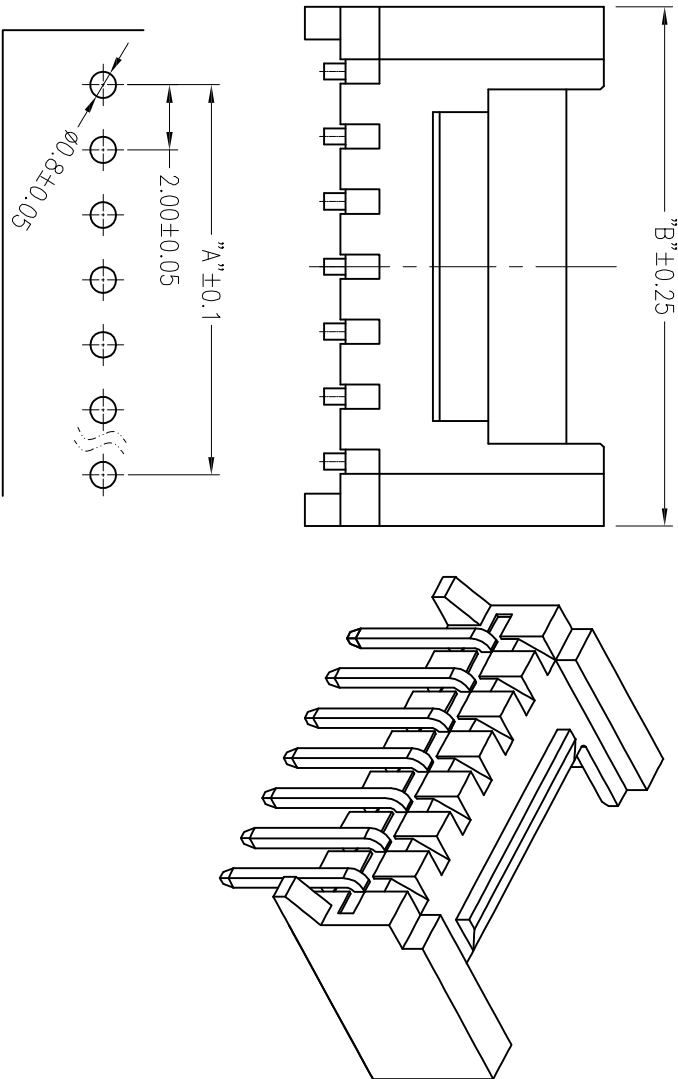

P.C.B. Layout

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	TITLE:			
DRAWN	ZHIWEI.CHEN	2015.07.07	GEPU 歌普			
CHECKED						
APPROVALS			PART NO.	GP01-2002WR-NP-L		
TOLERANCES ARE	30~0.1 10~0.30 5~10	±0.30 ±0.20 ±0.15	ANGLE	UNIT: mm	SCALE: 1:1	PROJ.
	~ 5	±0.10		DRAWING NO.		SHEET 1 OF 1

- 技术参数 SPECIFICATIONS
- ◆ 适用线规: AWG#30~#22
Applicable Wire: AWG#30~#22
 - ◆ 额定电压: 125V DC,AC(rms)
Rated voltage: 125V DC,AC(rms)
 - ◆ 额定电流: 2A (AWG #22)
Rated Current: 2A (AWG #22)
 - ◆ 耐压值: 1000V AC/minute
Withstand voltage: 1000V AC/min.
 - ◆ 工作温度: -25℃ ~ +85℃
Working Temp : -25℃ ~ +85℃
 - ◆ 绝缘电阻: ≥1000 MΩ
Insulation resistance: ≥1000 MΩ
 - ◆ 接触电阻: ≤20mΩ
Contact resistance: ≤20mΩ
- 材料 MATERIAL
- ◆ 胶壳: 尼龙66, UL94-V2
Housing: Nylon66, UL94-V2
 - ◆ 接触针: 黄铜
Contact PIN: Brass