

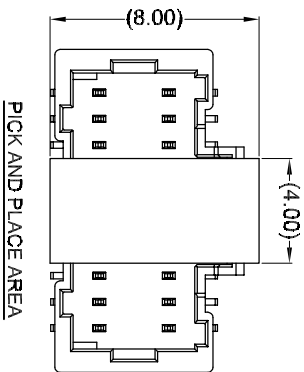
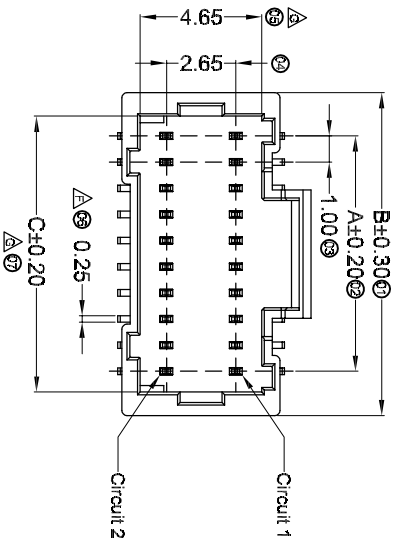


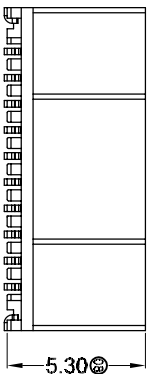
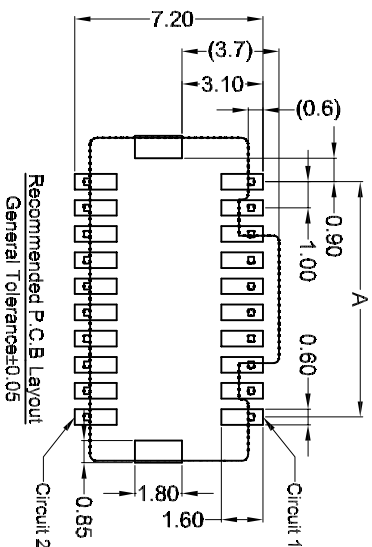


■ Specifications :

- Voltage rating: 50V AC / DC
- Current rating: 0.8A AC / DC
- Withstanding voltage: 250V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 100\text{M}\Omega$
- Contact resistance: $\leq 20\text{m}\Omega$
- After environmental testing: $\leq 30\text{m}\Omega$



Poles	Dimensions (mm)		
	A	B	C
2*10	9.00	12.35	10.55
2*12	11.00	14.35	12.55
2*15	14.00	17.35	15.55
2*20	19.00	22.35	20.55
2*25	24.00	27.35	25.55



APPROVALS		DATE	GEPU 歌普	
DRAWN	ZHIWEI.CHEN	2015.07.07		
CHECKED				
APPROVALS				
TOLERANCES ARE		ANGLE	PART NO.	GP01-1008WVS-2xNP
30~0.1	± 0.30		UNIT: mm	SCALE: 1:1
10~30	± 0.20			PROJ.
5~10	± 0.15			
~5	± 0.10	$\pm 2^\circ$	DRAWING NO.	SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.	
	A		NEW	