
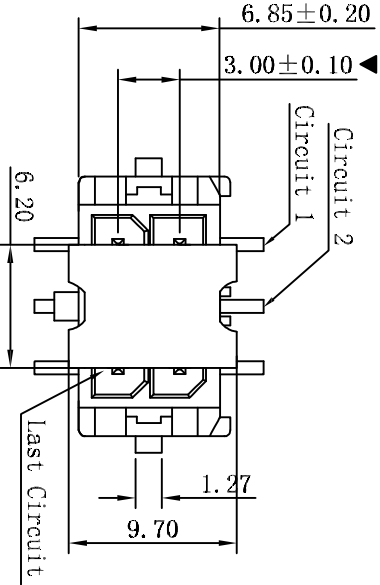
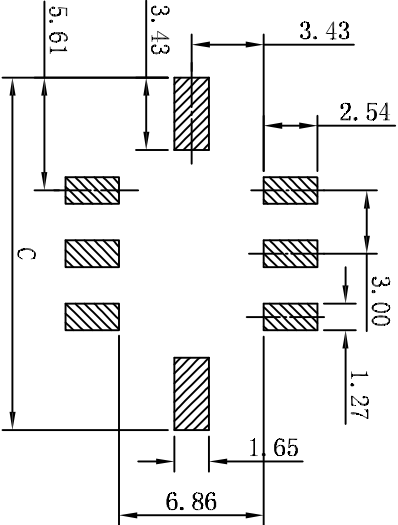
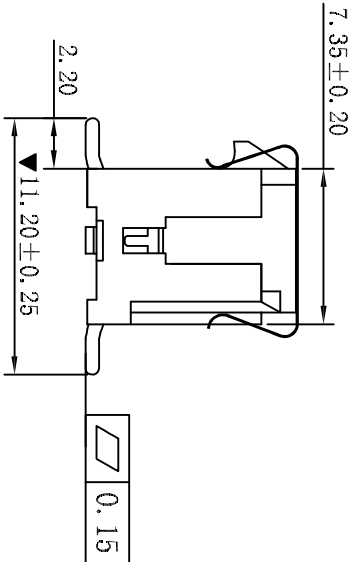


WITH CAP VIEW

WITHOUT CAP VIEW

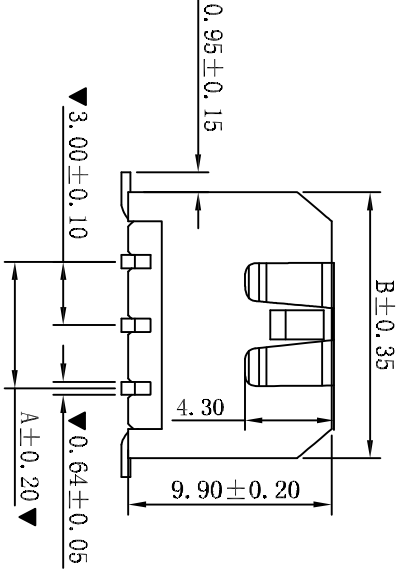

P. C. B. LAYOUT


SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25° C~+85° C
- Contact resistance: 20m Ω max

WAFER

- Part No. : 3045WVS-2xNP
- Poles : 02-24P
- Housing Material: LCP UL94V-0 Black
- Ter Material: Brass
- Solder Tabs Material: Brass
- Contact Area Plating: Tin-Plated
- Cap: Stainless Steel
- The Dimension Marked “▼” Must Be Recorded

PART NO.	Dimensions (mm)		
	A	B	C
2x01	--	6.65	11.20
2x02	3.00	9.65	14.20
2x03	6.00	12.65	17.20
2x04	9.00	15.65	20.20
2x05	12.00	18.65	23.20
2x06	15.00	21.65	26.20
2x07	18.00	24.65	29.20
2x08	21.00	27.65	32.20
2x09	24.00	30.65	35.20
2x10	27.00	33.65	38.20
2x11	30.00	36.65	41.20
2x12	33.00	39.65	44.20



APPROVALS		DATE		GEPU 歌普	
DRAWN	ZHIWEI.CHEN	2015.07.07			
CHECKED					
APPROVALS					
TOLERANCES ARE		30~0.15 10~0.30 5~10 ~5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	±2°
PART NO.		GP01-3045WVS-2*NP		UNIT: mm	SCALE: 1:1
DRAWING NO.				SHEET 1 OF 1	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			