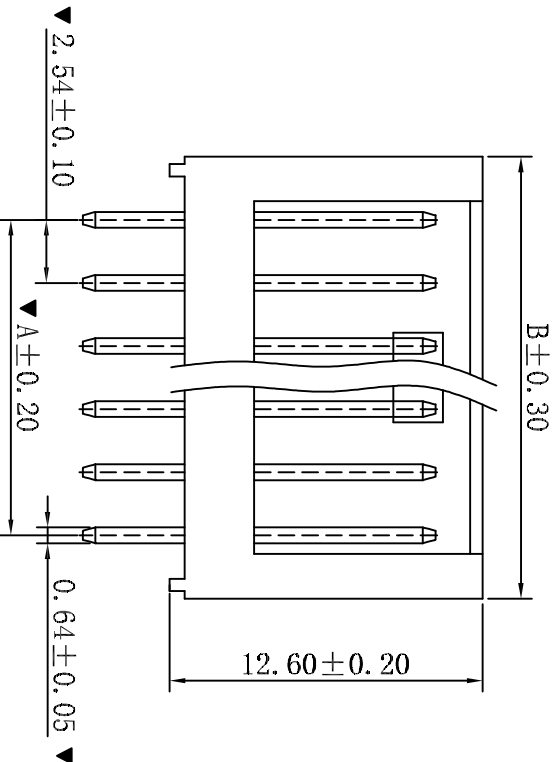
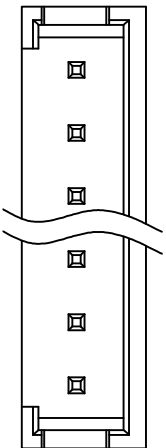


- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 1000V AC/minute
 - Insulation resistance: 100MΩ min
 - Temperature range: -25° C ~ +85° C
 - Contact resistance: 20mΩ max

- WAFER
- Part No. : 2544WV-NP
 - Poles : 02-22P
 - Housing Material : Nylon66 UL94V-2 Black
 - Pin Material : Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

PART NO.	Dimensions (mm)	
	A	B
02	2.54	7.70
03	5.08	10.20
04	7.62	12.70
05	10.16	15.20
06	12.70	17.80
07	15.24	20.30
08	17.78	22.90
09	20.32	25.40
10	22.86	28.00
11	25.40	30.50
12	27.94	33.10
13	30.48	35.60
14	33.02	38.10
15	35.56	40.70
16	38.10	43.20
17	40.64	45.70
18	43.18	48.20
19	45.72	50.70
20	48.26	53.20
21	50.80	55.70
22	53.34	58.50

APPROVALS		DATE	
DRAWN	ZHIWEI CHEN	2015.07.07	
CHECKED			
APPROVALS		TITLE: AMP2.54mm 180° Wafer	
PART NO.		GP01-2544WV-NP	
TOLERANCES ARE		SCALE: 1:1	
30~0.10		PROJ	
10~0.30		SHEET 1 OF 1	
5~10			
~5			
±0.10			
±0.15			
±2°			
DRAWING NO.			
ECN NO.			
REV.			
DATE.			
DESCRIPTION.			
NEW			
A			