
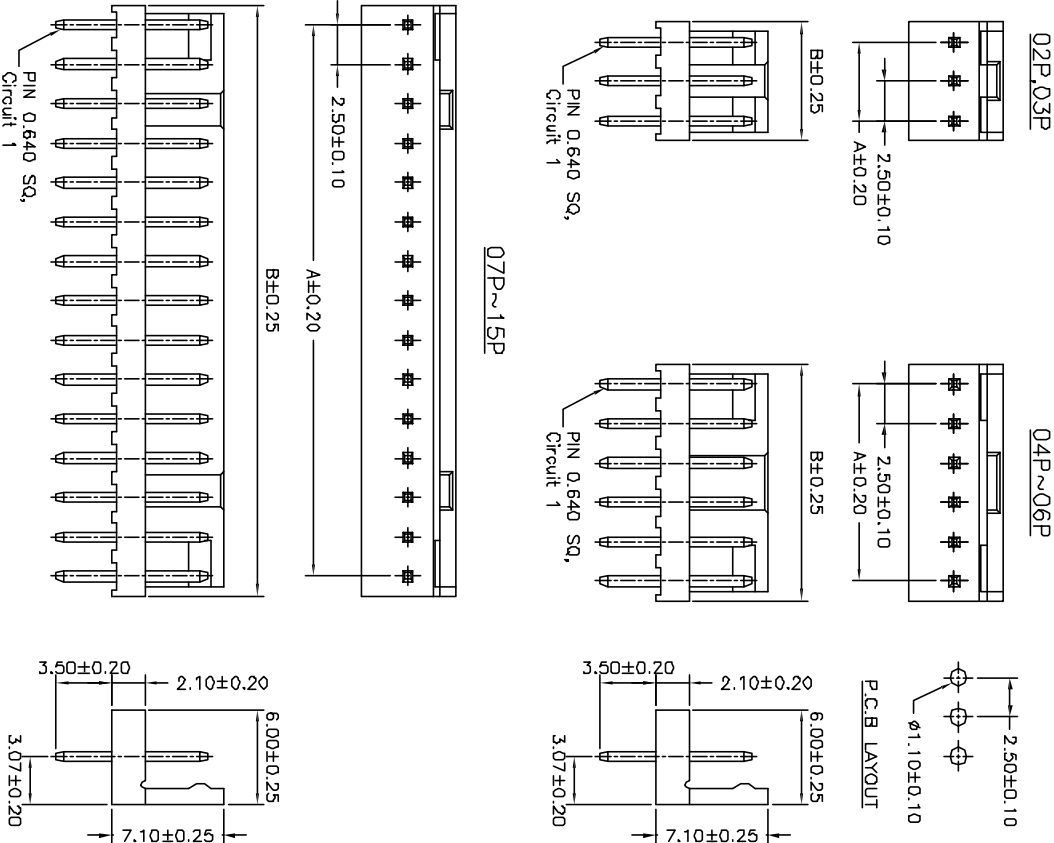


SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 500V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 100MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 66,UL94V-0
Pantone Color: 153C

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
2500WV-02P	2.50	5.00
2500WV-03P	5.00	7.50
2500WV-04P	7.50	10.00
2500WV-05P	10.00	12.50
2500WV-06P	12.50	15.00
2500WV-07P	15.00	17.50
2500WV-08P	17.50	20.00
2500WV-09P	20.00	22.50
2500WV-10P	22.50	25.00
2500WV-11P	25.00	27.50
2500WV-12P	27.50	30.00
2500WV-13P	30.00	32.50
2500WV-14P	32.50	35.00
2500WV-15P	35.00	37.50



ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	TITLE: 2.5mm Connector			
DRAWN	ZHIWEI.CHEN	2015.07.07				
CHECKED						
APPROVALS			PART NO.	GP01-2500WV-NP		
TOLERANCES ARE	30~0.15 10~0.20 5~0.10 ~5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	±2°	UNIT: mm	SCALE: 1:1
			DRAWING NO.		SHEET 1 OF 1	

