


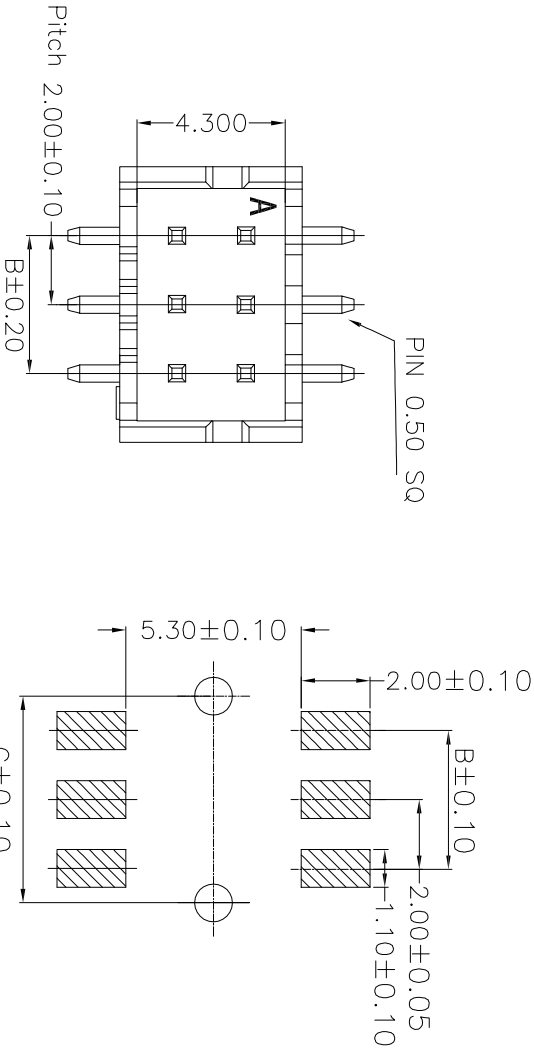

Specifications:

Current rating:3A AC/DC.

Voltage rating:250V AC/DC


Temperature range:-40°C~+105°C.

Contact resistance:10MΩ Max.

Insulation resistance:1000MΩ Min.

Withstanding voltage: 800V AC/minute.

Material:pa9t 94v0.

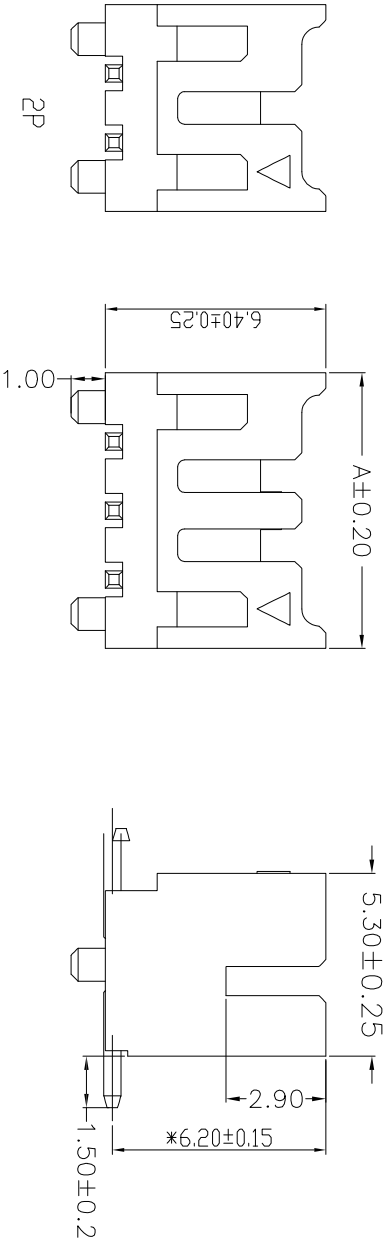

PART NO.	Dimensions		
	A	B	C
2X02P	6.00	2.00	4.00
2X03P	8.00	4.00	6.00
2X04P	10.00	6.00	8.00
2X05P	12.00	8.00	10.00
2X06P	14.00	10.00	12.00
2X07P	16.00	12.00	14.00
2X08P	18.00	14.00	16.00
2X09P	20.00	16.00	18.00
2X10P	22.00	18.00	20.00
2X11P	24.00	20.00	22.00
2X12P	26.00	22.00	24.00
2X13P	28.00	24.00	26.00
2X14P	30.00	26.00	28.00
2X15P	32.00	28.00	30.00
2X16P	34.00	30.00	32.00
2X17P	36.00	32.00	34.00
2X18P	38.00	34.00	36.00
2X19P	40.00	36.00	38.00
2X20P	42.00	38.00	40.00

APPROVALS		DATE		GEPU歌普			
DRAWN	ZHIWEI.CHEN	2015.07.07					
CHECKED							
APPROVALS				TITLE: 2.0mm PITCH 180°-SMT			
TOLERANCES ARE				PART NO. GP01-2004WVS-2xNP-L			
30~0.15 10~0.30 5~10 ~ 5		±0.30 ±0.20 ±0.15 ±0.10		ANGLE ±2°		UNIT: mm SCALE: 1:1 PROJ: P1 SHEET 1 OF 1	
ECN NO.	REV.	DATE.	DESCRIPTION.		CHANGE.	CHECK.	APPRO.