
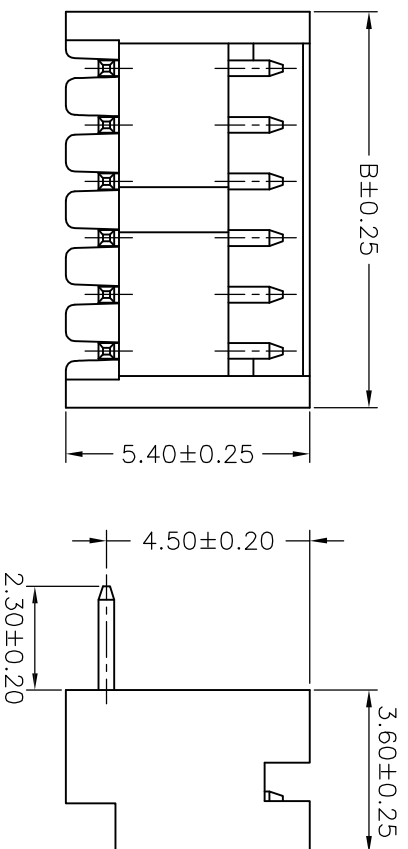

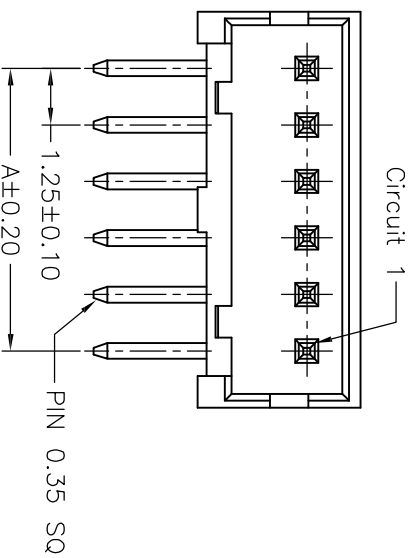
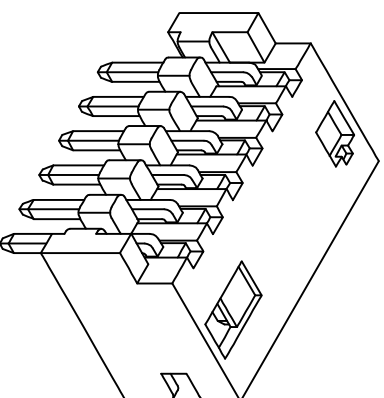


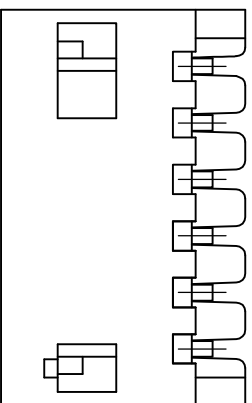

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 150V AC,DC

Temperature Range: -25°C ~ $+85^{\circ}\text{C}$

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500M Ω Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Brass/Tin-plated

Material: Nylon 66, UL94V-0

Pantone Color: 7529C~7530C

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
1252WR-02P	1.25	3.75
1252WR-03P	2.50	5.00
1252WR-04P	3.75	6.25
1252WR-05P	5.00	7.50
1252WR-06P	6.25	8.75
1252WR-07P	7.50	10.00
1252WR-08P	8.75	11.25
1252WR-09P	10.00	12.50
1252WR-10P	11.25	13.75
1252WR-11P	12.50	15.00
1252WR-12P	13.75	16.25
1252WR-13P	15.00	17.50
1252WR-14P	16.25	18.75
1252WR-15P	17.50	20.00

[illegible]