ROHS

www.gepu.tw

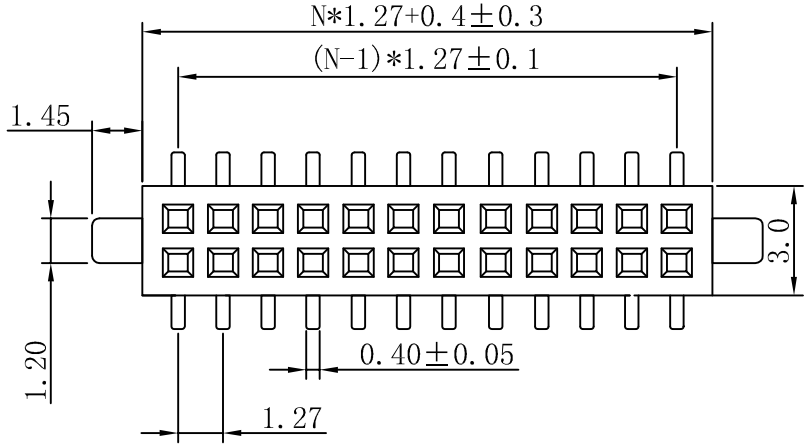

SPECIFICATIONS
Current Rating:2Amps
Insulator resistance:5000 Megchms min.
Dielectric Withstanding: AC 500V
Operating Temperature:-40° to +105° C
Contact Material:Phosphor Bronzs
Insulator Material:NYLON-6T
Plating: Gold Flash
Unspecified tolerance:±0.20

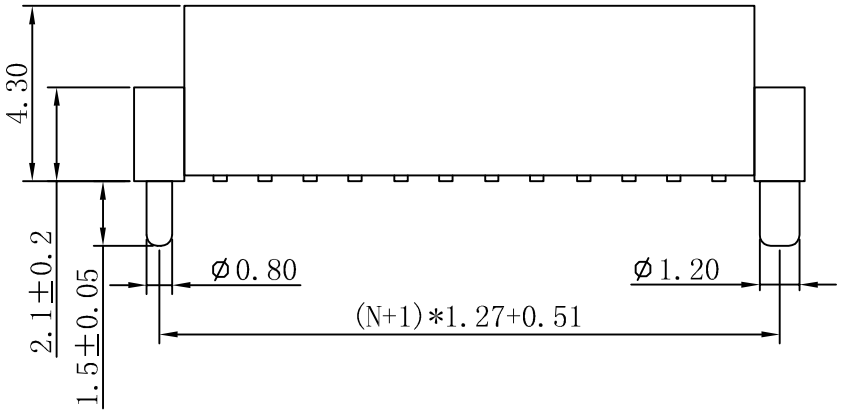



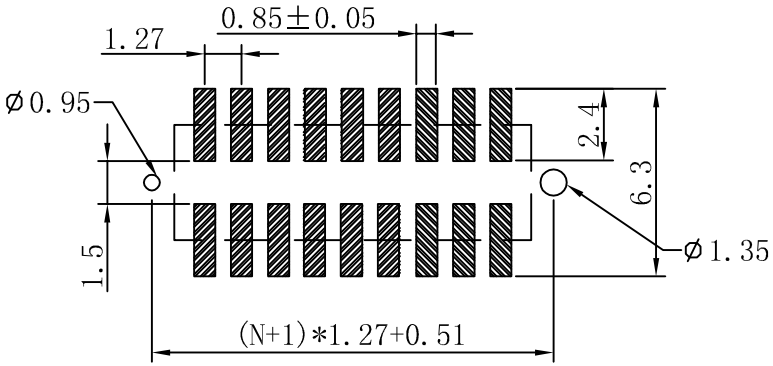

RECOMMENDED P.C.B LAYOUT

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE
DRAWN	ZHIWEI.CHEN	2015.07.07
CHECKED		
APPROVALS		

TOLERANCES ARE: 30~以上 ±0.30; 10~30 ±0.20; 5~10 ±0.15; ~ 5 ±0.10

ANGLE ±2°

GEPU歌普

TITLE:	FEMALE HEADER PITCH1.27*4.3mm SMD
PART NO.	GP25-1272WVS-2xNP-L
UNIT: mm	SCALE: 1:1
PROJ:	
DRAWING NO.	
SHEET 1 OF 1	