








PCB LAYOUT:Component Side
Recommended PCB Thickness 1.78MMX


PART NO.	Dimensions(mm)	
	A	B
2x01	--	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25°C ~ $+85^{\circ}\text{C}$
- Contact resistance: 20m Ω max

WAFER

- Part No.: 4255WR-2xNP-L
- Poles : 02-16P
- Housing Material: PA66 UL94V-2 or UL94V-0
- Pin Material: Brass
- Contact Area Plating: Tin-Plated or Gold-Flash
- Mates With: H4201 dual row receptacle
- The Dimension Marked “▼” Must Be Recorded

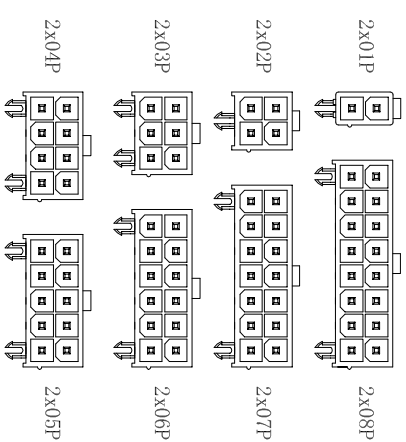

CIRCUIT SIZE LAYOUT

[illegible]