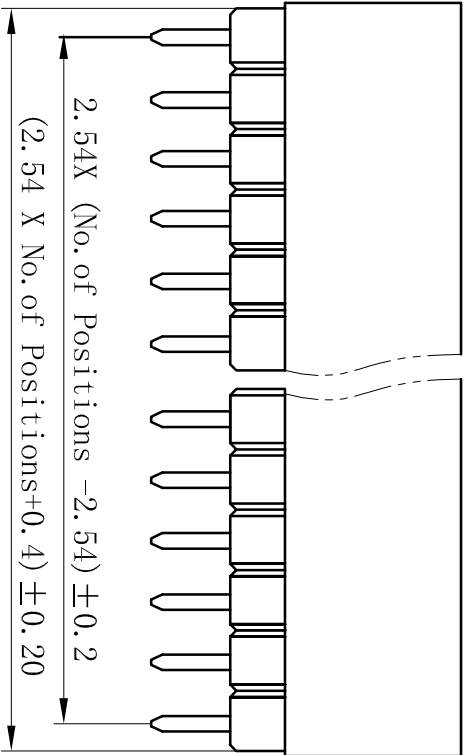
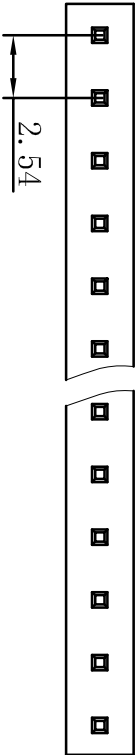



SPECIFICATIONS

Current Rating: 3Amps
Insulator Resistance: 5000MΩohms min.
Dielectric Withstanding: AC 500v
Operating Temperature: -40°C ~ +105°C
Contact Material: Brass
Insulator Material: PA6T
Finish: Gold flash

UNSPECIFIED TOLERANCE: ±0.20

Dimen Sions List

Contacts Per row	Dimensions		Contacts Per row	Dimensions	
	A	B		A	B
1	2.54	0	21	53.34	50.80
2	5.08	2.54	22	55.88	53.34
3	7.62	5.08	23	58.42	55.88
4	10.16	7.62	24	60.96	58.42
5	12.70	10.16	25	63.50	60.96
6	15.24	12.70	26	66.04	63.50
7	17.78	15.24	27	68.58	66.04
8	20.32	17.78	28	71.12	68.58
9	22.86	20.32	29	73.66	71.12
10	25.40	22.86	30	76.20	73.66
11	27.94	25.40	31	78.74	76.20
12	30.48	27.94	32	81.28	78.74
13	33.02	30.48	33	83.82	81.28
14	35.56	33.02	34	86.36	83.82
15	38.10	35.56	35	88.90	86.36
16	40.64	38.10	36	91.44	88.90
17	43.18	40.64	37	93.98	91.44
18	45.72	43.18	38	96.52	93.98
19	48.26	45.72	39	99.06	96.52
20	50.80	48.26	40	101.6	99.06



PCB LAYOUT

APPROVALS		DATE		GEPU歌普	
DRAWN	ZHIWEI.CHEN	2015.07.07			
CHECKED		TITLE:			
APPROVALS		PART NO.		GP25-2521WV-NP-1B	
TOLERANCES ARE		ANGLE		SCALE: 1:1	
30°~0.1° 10°~30° 5°~10° ~5°		±0.30° ±0.20° ±0.15° ±0.10°		PROJ.	
DRAWING NO.		UNIT: mm		SHEET 1 OF 1	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			