
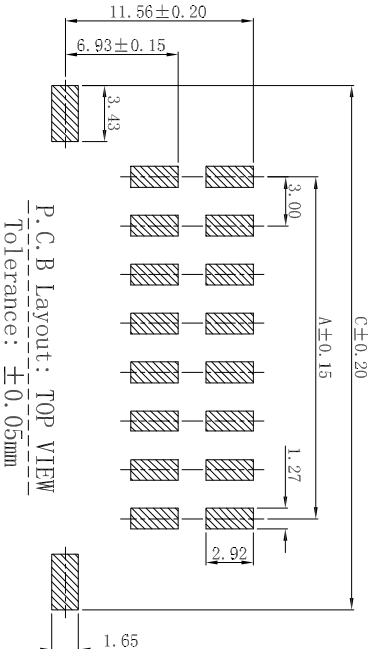
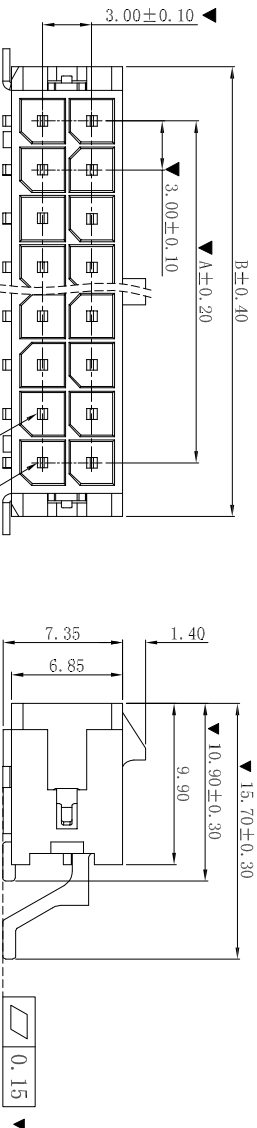
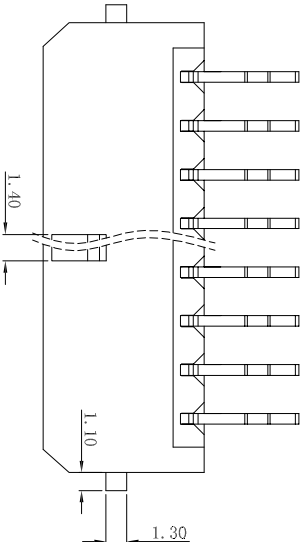


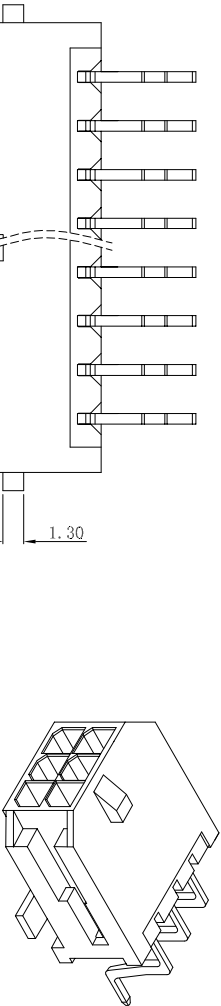

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1000V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -40° C~+105° C
 - Contact resistance: 20m Ω max
- WAFER
- Part No. : 3045WRS-2xNP
 - Poles : 02-24P
 - Housing Material: LCP UL94V-0 Black
 - Ter Material: Brass
 - Solder Tabs Material: Brass
 - Contact Area Plating: Matte Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)		
	A	B	C
2x01	--	6.65	11.20
2x02	3.00	9.65	14.20
2x03	6.00	12.65	17.20
2x04	9.00	15.65	20.20
2x05	12.00	18.65	23.20
2x06	15.00	21.65	26.20
2x07	18.00	24.65	29.20
2x08	21.00	27.65	32.20
2x09	24.00	30.65	35.20
2x10	27.00	33.65	38.20
2x11	30.00	36.65	41.20
2x12	33.00	39.65	44.20

APPROVALS		DATE	TITLE: 3.0mm SMT 90° 焊片式					
DRAWN	ZHIWEI.CHEN	2015.07.07						
CHECKED			PART NO. GP01-3045WRS-2xNP					
APPROVALS								
TOLERANCES ARE		30~0.15 10~0.30 5~10 ~5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE ±2°				
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	DRAWING NO.	SHEET 1 OF 1
	A		NEW					