
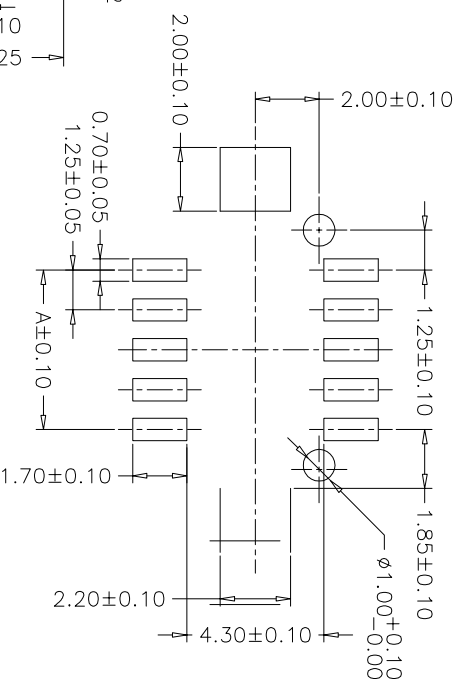


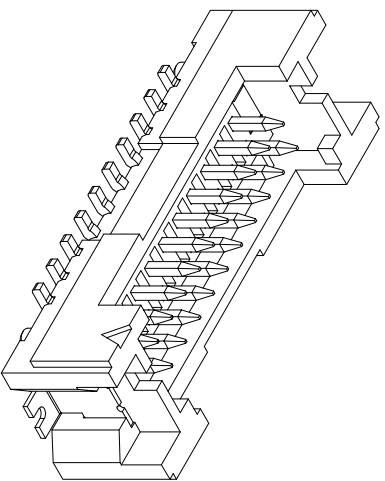

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 150V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500M Ω Min.

Withstanding Voltage: 500V AC/minute



Pin Material: Brass/Gold-flash

Solder Tabs: Brass/Tin-plated

Cap: Nylon 6T, UL94V-0, Natural(Beige)

Wafer: Nylon 6T, UL94V-0

Color: Natural(Beige)

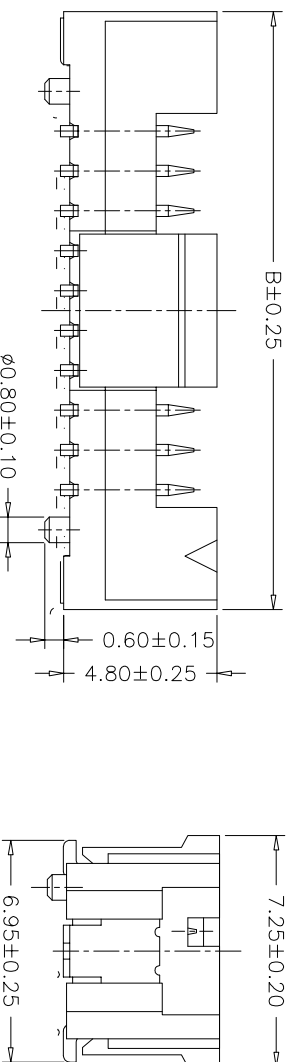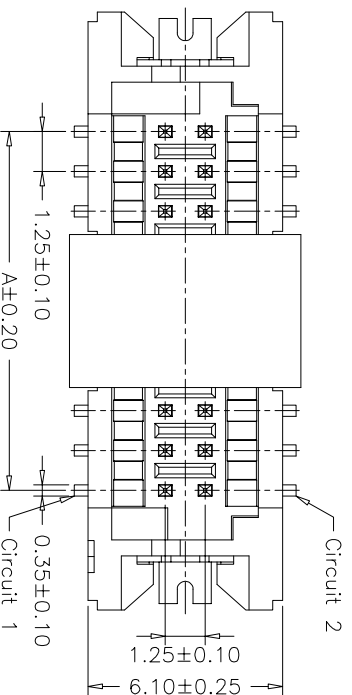

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
1252WVS-2X05P	5.00	12.50
1252WVS-2X07P	7.50	15.00
1252WVS-2X10P	11.25	18.75
1252WVS-2X15P	17.50	25.00
1252WVS-2X20P	23.75	31.25

[illegible]