

No Mark

NOTE:

1. MATERIAL:

Housing:PA66, Color:Black, UL 94V-0

Contact:Copper Alloy, T=0.08MM

0.127~0.20um Gold Plating on Contact area Over Nickel Plated;

Shell:Copper Alloy, T=0.12mm

0.0508~0.127um Gold Plating on Contact area Over Nickel Plated;




2. PRODUCT PERFORMANCE:

Termination Resistance:20MΩ Max





Dielectric Withstanding Voltage:200V AC,1 Minute

Insulation Resistance:500MΩ Min

Durability:30 Cycles Min

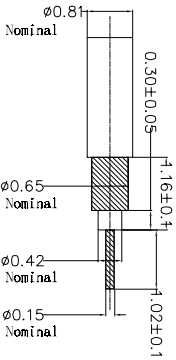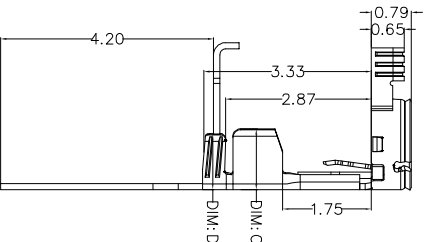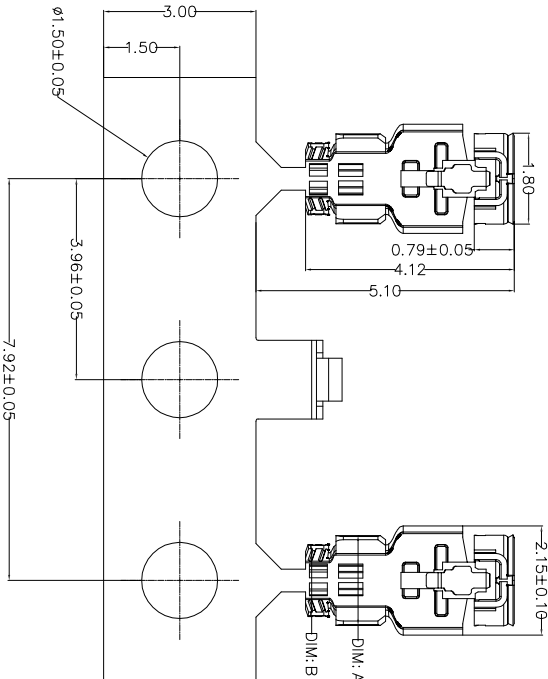

Applicable Cable Nominal Dimension



INFORMATION OF THE PACKING

PART NUMBER	Q`TY/REEL
GP-4B-D-01	3000PCS

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	TITLE: 四代线端			
DRAWN	ZHIWEI.CHEN	2015.07.07				
CHECKED						
APPROVALS			PART NO.	GP-4B-D-01		
TOLERANCES ARE		30~0.15 10~30 5~10 ~5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	UNIT: mm	SCALE: 1:1
			±2°	DRAWING NO.		PROJ. 1 OF 1

