


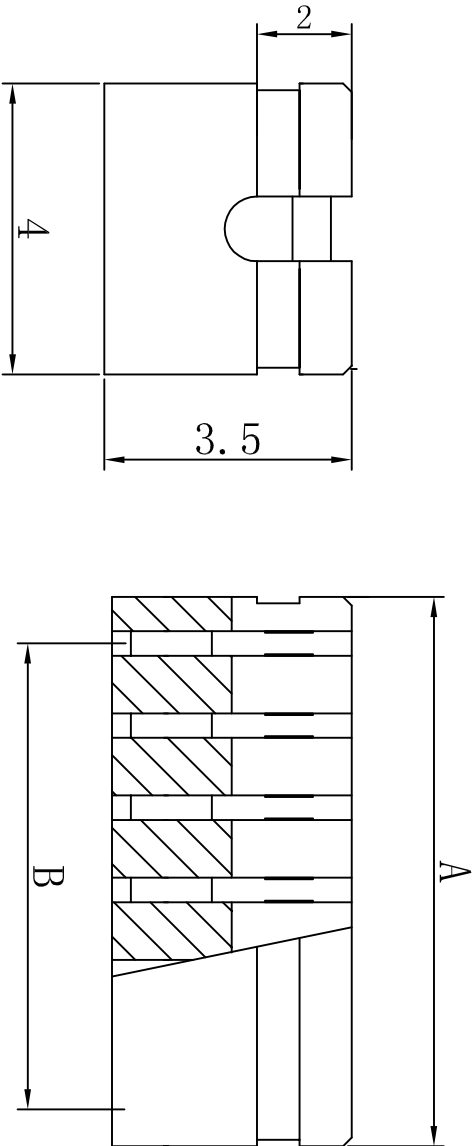


SPECIFICATIONS

Contact Resistance: 3 aperes Max
Current Rationg: 3m Max
Insulator Resistance: 1000 Megohms Max
Dielectric Withstanding Voltage:
AC 650 Volts RMS at sealeve

Dimensions list

Contacts Per row	Dimensions	
	A	B
1	2.0 (0.079)	0 (0)
2	4.0 (0.157)	2.0 (0.079)
3	6.0 (0.236)	4.0 (0.157)
4	8.0 (0.315)	6.0 (0.236)
5	10.0 (0.393)	8.0 (0.315)
6	12.0 (0.472)	10.0 (0.393)
7	14.0 (0.551)	12.0 (0.472)
8	16.0 (0.630)	14.0 (0.551)
9	18.0 (0.709)	16.0 (0.630)
10	20.0 (0.787)	18.0 (0.709)

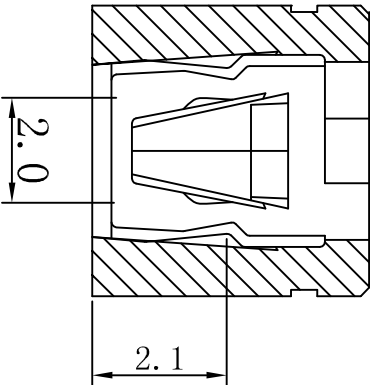

APPROVALS		DATE	TITLE	
DRAWN	ZHIWEI.CHEN	2015.07.07	MINI JUMPER PITCH2.0mm	
CHECKED				
APPROVALS			PART NO.	GP25-2022WV-INP-M
TOLERANCES ARE		30~0.15 10~0.30 5~10	±0.30 ±0.20 ±0.15	ANGLE
		~ 5	±0.10	±2°
DRAWING NO.			SCALE: 1:1	PROJ.
SHEET		1	OF 1	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			