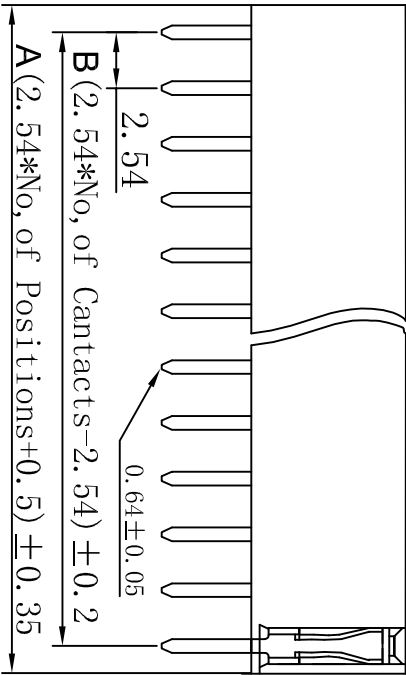


SPECIFICATIONS

Current Rating:3Amps

Insulator resistance:5000Megohms min.

Dielectric Withstanding: AC 500V

Operating Temperature:-40° C ~to +105° C


Contact Material: Brass

Insulator Material:PA9T

Unspecified tolerance:±0.20

Dimen Sions List

Contacts	Dimensions		Contacts	Dimensions	
	A	B		A	B
1*1	2.54	0	1*21	53.34	50.80
1*2	5.08	2.54	1*22	55.88	53.34
1*3	7.62	5.08	1*23	58.42	55.88
1*4	10.16	7.62	1*24	60.96	58.42
1*5	12.70	10.16	1*25	63.50	60.96
1*6	15.24	12.70	1*26	66.04	63.50
1*7	17.78	15.24	1*27	68.58	66.04
1*8	20.32	17.78	1*28	71.12	68.58
1*9	22.86	20.32	1*29	73.66	71.12
1*10	25.40	22.86	1*30	76.20	73.66
1*11	27.94	25.40	1*31	78.74	76.20
1*12	30.48	27.94	1*32	81.28	78.74
1*13	33.02	30.48	1*33	83.82	81.28
1*14	35.56	33.02	1*34	86.36	83.82
1*15	38.10	35.56	1*35	88.90	86.36
1*16	40.64	38.10	1*36	91.44	88.90
1*17	43.18	40.64	1*37	93.98	91.44
1*18	45.72	43.18	1*38	96.52	93.98
1*19	48.26	45.72	1*39	99.06	96.52
1*20	50.80	48.26	1*40	101.6	99.06



APPROVALS		DATE		GEPU歌普			
DRAWN	ZHIWEI.CHEN	2015.07.07					
CHECKED							
APPROVALS							
TITLE:		PH2.54*8.5 180° 排母					
PART NO.		GP25-2521WV-NP					
TOLERANCES ARE		30~0.1	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ
		10~30	±0.20				
		5~10	±0.15	±2°	DRAWING NO.		SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.		CHANGE.	CHECK.	APPRO.
			NEW				