




TOP VIEW




LEFT SIDE VIEW

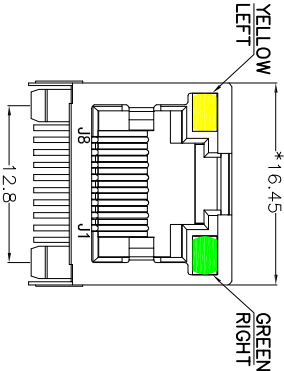


FRONT VIEW




RIGHT SIDE VIEW




BACK VIEW



BOTTOM VIEW




RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

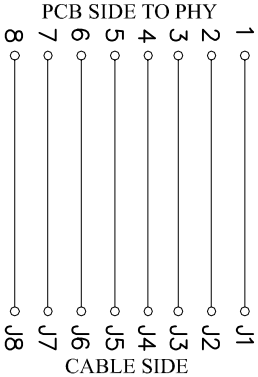

LED Specification

Standard LED Color	LED Wavelength	Forward(A)	Forward(V)
Green	569nm	20mA	1.85-2.45V
Yellow	589nm	20mA	1.7-2.2V



MATERIAL:
HOUSING: PA46,UL94V-0,BLACK.
TERMINAL: PHOSPHOR BRONZE Ø=0.46MM, G/FU" GOLD PLATING.
SHIELD: C2680,T=0.20MM,20U" MIN NICKEL PLATING
ON ALL AREA.

MACHANICAL:
DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: -40℃~+85℃.
STORAGE TEMPERATURE: -40℃~+85℃.
ALL CRITICAL DIMENSIONS WITH "+0"

ELECTRICAL:
VOLTAGE: 125 VOLTS AC.
CURRENT RATING : 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL.
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

APPROVALS		DATE	GEPU 歌普			
DRAWN	ZHIWEI.CHEN	2015.07.07				
CHECKED			TITLE:			
APPROVALS			PART NO.	RJ45-6W11-DDY(G)-AB-88-B2	SCALE:	1:1
TOLERANCES ARE		30~0.15 10~0.30 5~0.10 ~5	ANGLE	±2°	DRAWING NO.	
ECN NO.	REV.	DATE.	DESCRIPTION.			
	A		NEW			
			CHANGE.			
			CHECK.			
			APPRO.			
			SHEET 1 OF 1			