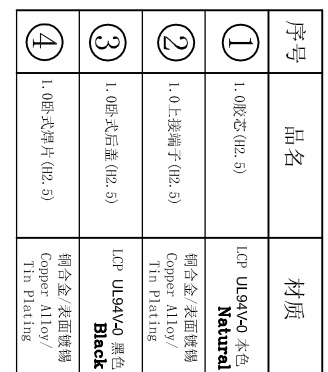
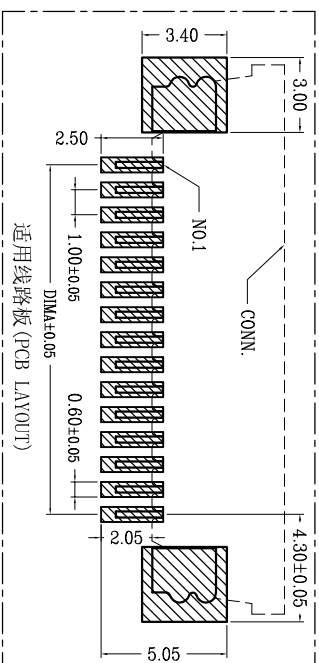
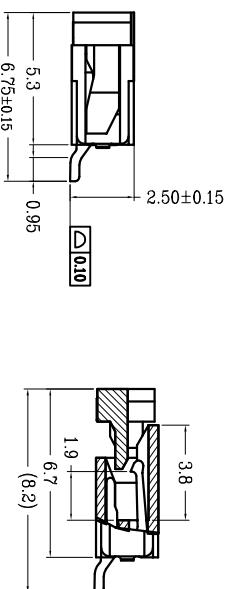
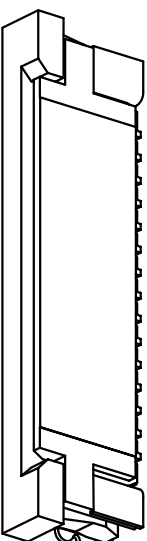
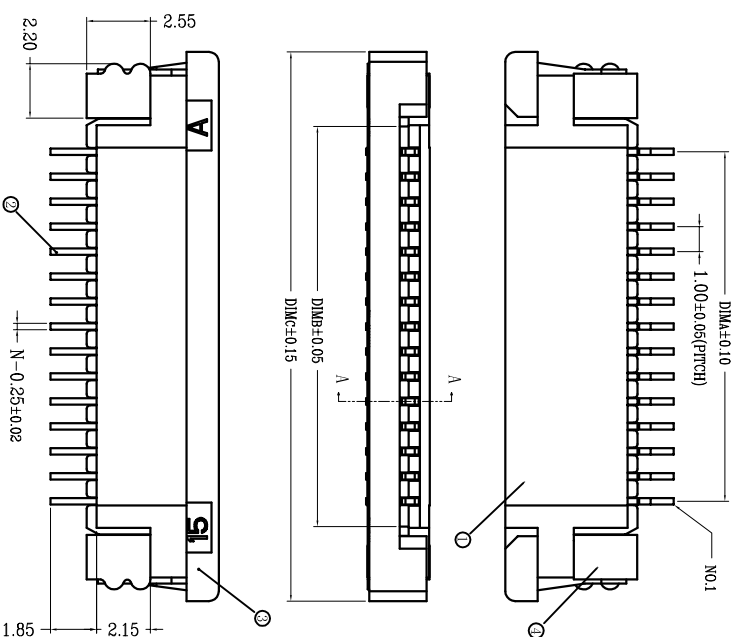


适用扁平线 (Applicable Flat Cable)

СКТ	ДМТ А	ДМТ В	ДМТ С
4	3.00	5.03	11.10
5	4.00	6.03	12.11
6	5.00	7.03	13.11
7	6.00	8.03	14.11
8	7.00	9.03	15.11
9	8.00	10.03	16.11
10	9.00	11.03	17.11
11	10.00	12.03	18.11
12	11.00	13.03	19.11
13	12.00	14.03	20.11
14	13.00	15.03	21.11
15	14.00	16.03	22.11
16	15.00	17.03	23.11
17	16.00	18.03	24.11
18	17.00	19.03	25.11
19	18.00	20.03	26.11
20	19.00	21.03	27.11
21	20.00	22.03	28.11
22	21.00	23.03	29.11
23	22.00	24.03	30.11
24	23.00	25.03	31.11
25	24.00	26.03	32.11
26	25.00	27.03	33.11
27	26.00	28.03	34.11
28	27.00	29.03	35.11
29	28.00	30.03	36.11
30	29.00	31.03	37.11
31	30.00	32.03	38.11
32	31.00	33.03	39.11
33	32.00	34.03	40.11
34	33.00	35.03	41.11
35	34.00	36.03	42.11
36	35.00	37.03	43.11
37	36.00	38.03	44.11
38	37.00	39.03	45.11
39	38.00	40.03	46.11
40	39.00	41.03	47.11

技术指标(Technical Index):

1. 塑件表面应光洁、无毛边、无明显收缩、凹陷、裂纹等现象。
(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena.)
2. 温度范围 (Temperature range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
3. 额定电压 (Rated voltage): 50V , AC/DC (等效).
4. 接触电阻 (Contact resistance): $\leq 0.03\Omega$.
5. 绝缘电阻 (Insulation resistance): $\geq 500\text{M}\Omega$.

[illegible]