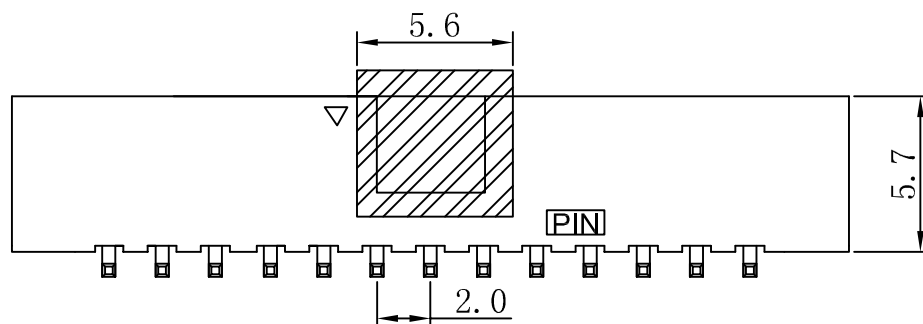
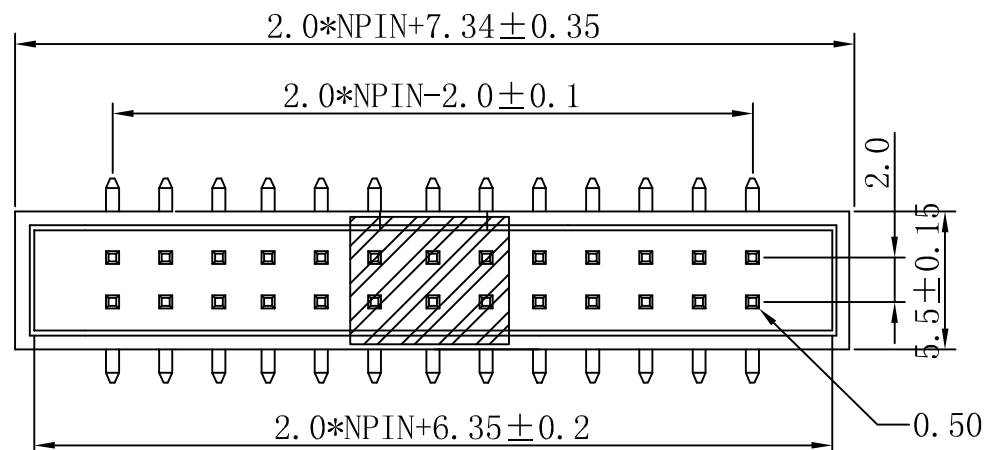
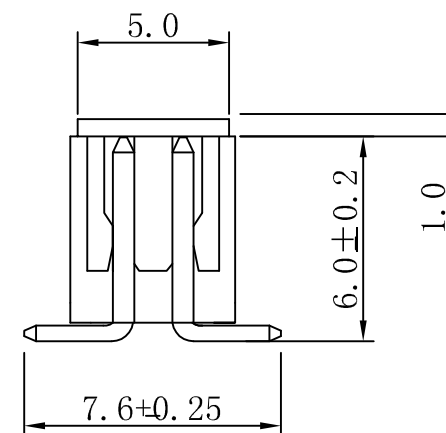


PCB LAYOUT

SPECIFICATIONS

Current Rating:	2Amps
Insulator resistance:	5000 Megohms min.
Dielectric Withstaanding:	AC 500V
Operating Temperature:	-40° C to +105° C
Insulator Material:	NYLON-6T
Plating:	Gold flash
UNIT:	MM

UNSPECIFIED TOLERANCE: ± 0.20 

APPROVALS		DATE	GEPU 歌普			
DRAWN	ZHIWEI.CHEN	2015.07.07				
CHECKED			TITLE:	PH2.0mm SMT 简牛 2*NP		
APPROVALS			PART NO.	GP23-2023WVS-2xNP		
TOLERANCES ARE	30~以上	± 0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
	10~30	± 0.20				
	5~10	± 0.15				
	~ 5	± 0.10	$\pm 2'$	DRAWING NO.		SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			