ROHS

www.gepu.tw

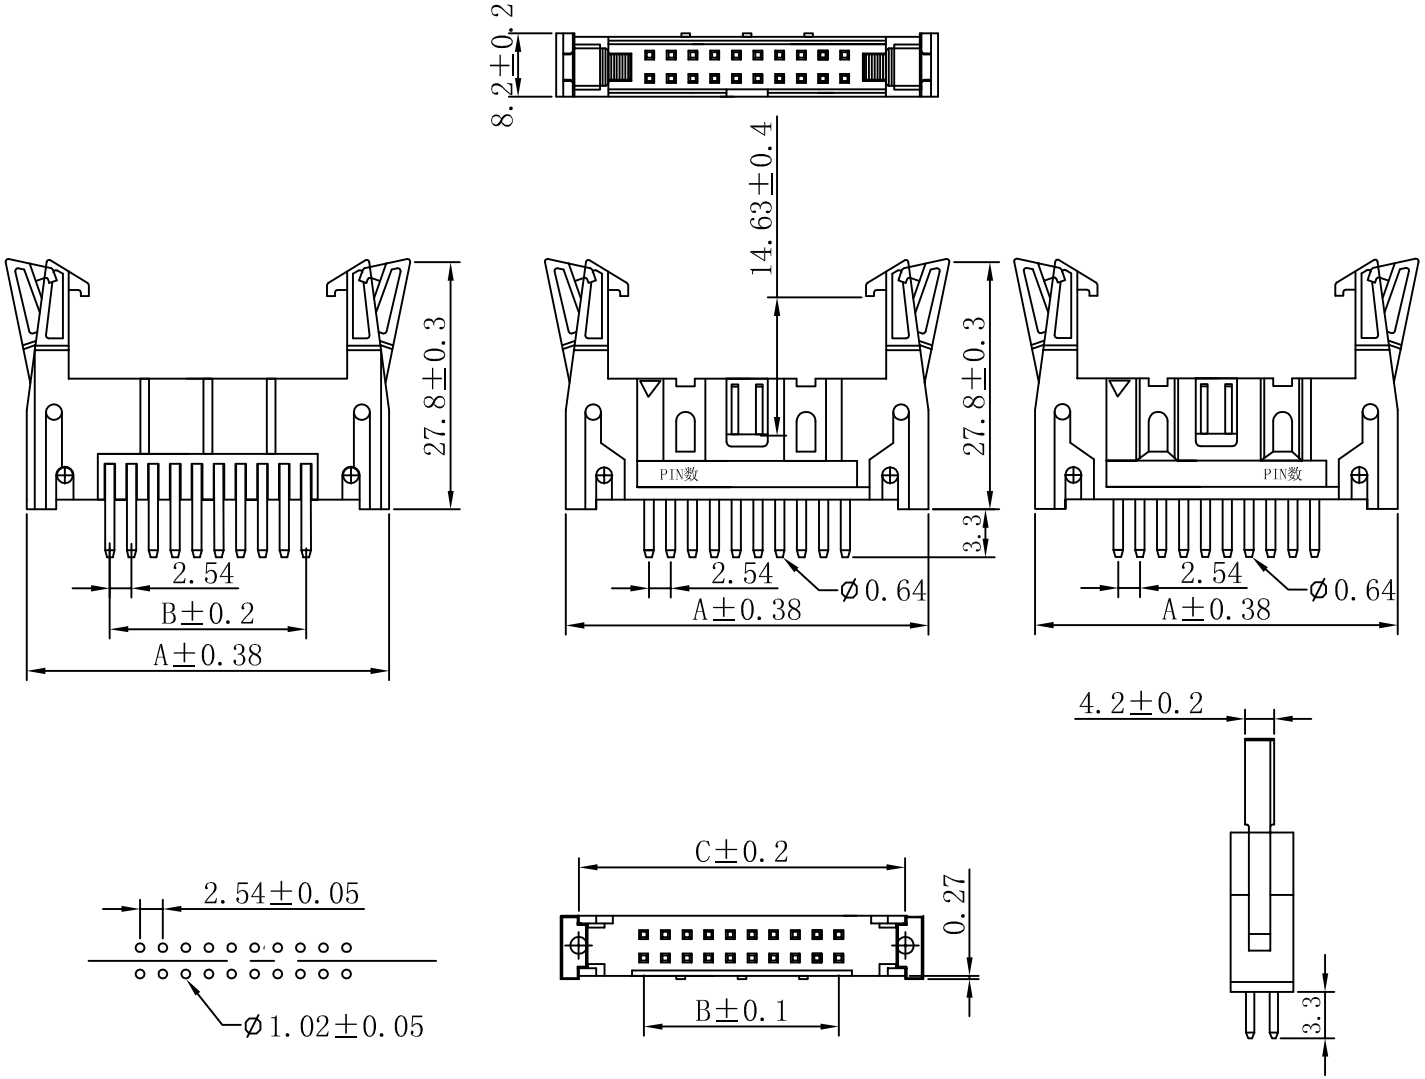

1. MATERIALS AND FINISH
   1.1 HOUSING MATERIALS:
   PA6T
   1.2 CONTACTS:
   Brass
   1.3 PLATING:
   PLATING GOLD OVERALL
   UNDERPLATING NICKEL
2. SPECIFCATIONS
   2.1 CURRENT RATING:
   1AMP. MAX
   2.2 INSULATION RESISTANCE:
   1000MΩMIN AT 500V DC
   2.3 DIELECTRIC WITHSTANDING VOLTAGE:
   500V(r.m.s) AC FOR 1 MINUTE.
   2.4 OPERATING TEMPERATURE:
   -40° C TO +85Ø.

NUMBER OF PASITION	Dimensions A	B	C
10	32.00	10.16	27.94
14	37.08	15.24	33.02
16	39.62	17.78	35.56
20	44.70	22.86	40.94
24	49.78	27.94	45.72
26	52.32	30.48	48.26
30	57.40	35.56	53.34
34	62.48	40.64	58.42
40	70.10	48.26	66.04
50	82.80	60.96	78.74
60	95.50	73.66	91.44
64	100.58	78.74	96.72

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE
DRAWN	ZHIWEI.CHEN	2015.07.07
CHECKED		
APPROVALS		

TOLERANCES ARE: 30~以上 ±0.30; 10~30 ±0.20; 5~10 ±0.15; ~5 ±0.10; ANGLE ±2°

GEPU歌普

TITLE: HEADER PH2.54mm DIP 180度

PART NO. GP24-2523WV-2xNP

UNIT: mm | SCALE: 1:1 | PROJ:

DRAWING NO. | SHEET 1 OF 1