

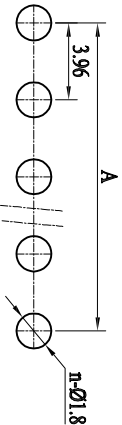
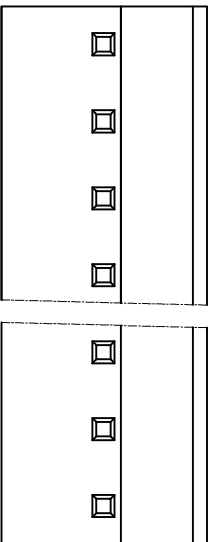
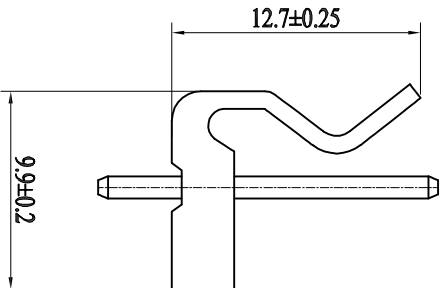


POLES	PART NO	DIMENSIONS(mm)	
		A	B
2	2	3.96	7.92
3	3	7.92	11.88
4	4	11.88	15.84
5	5	15.84	19.8
6	6	19.8	23.76
7	7	23.76	27.72
8	8	27.72	31.68
9	9	31.68	35.64
10	10	35.64	39.6
11	11	39.6	43.56
12	12	43.56	47.52
13	13	47.52	51.48
14	14	51.48	55.44
15	15	55.44	59.4
16	16	59.4	63.36

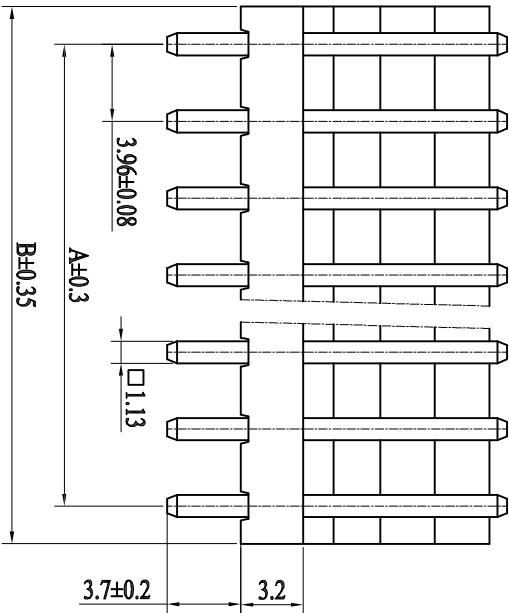

PCB 寸法
PCB LAYOUT



■ 技术参数 (SPECIFICATIONS)

- ◆ 额定电压: 250V AC DC
- ◆ Voltage rating: 250V AC DC
- ◆ 额定电流: 5.0A AC DC MIN
- ◆ Current rating: 5.0A AC DC MIN
- ◆ 耐压值: 1500V AC/minute
- ◆ Withstand voltage: 1500V AC/minute
- ◆ 绝缘电阻: 1000MΩ MIN
- ◆ Insulation resistance: 1000MΩ MIN
- ◆ 接触电阻: 0.02Ω MAX
- ◆ Contact resistance: 0.02Ω MAX
- ◆ 工作温度: -25℃ ~+85℃
- ◆ Working Temperature: -25℃ ~+85℃
- ◆ 间距: 3.96 mm
- ◆ Pitch: 3.96 mm

■ 材料 (MATERIAL)

- ◆ 外壳: 尼龙66
- ◆ Housing: PA66

FCB LA1001									