

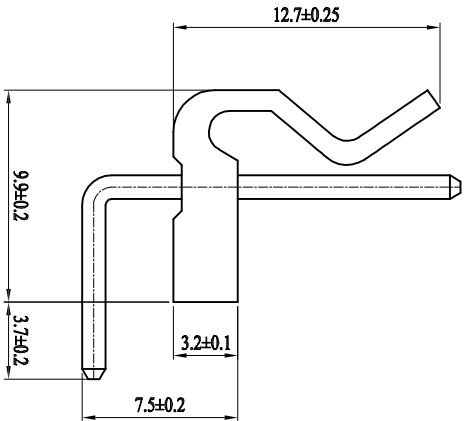
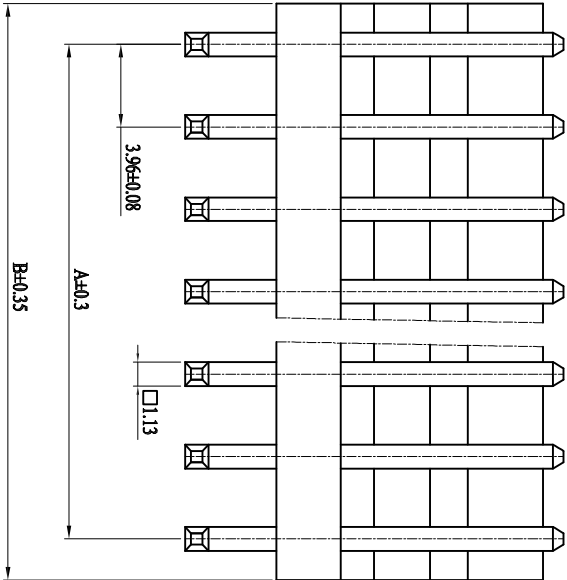



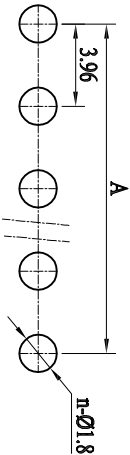

POLES	PART NO	DIMENSIONS(mm)	
		A	B
2	2	3.96	7.92
3	3	7.92	11.88
4	4	11.88	15.84
5	5	15.84	19.8
6	6	19.8	23.76
7	7	23.76	27.72
8	8	27.72	31.68
9	9	31.68	35.64
10	10	35.64	39.6
11	11	39.6	43.56
12	12	43.56	47.52
13	13	47.52	51.48
14	14	51.48	55.44
15	15	55.44	59.4
16	16	59.4	63.36

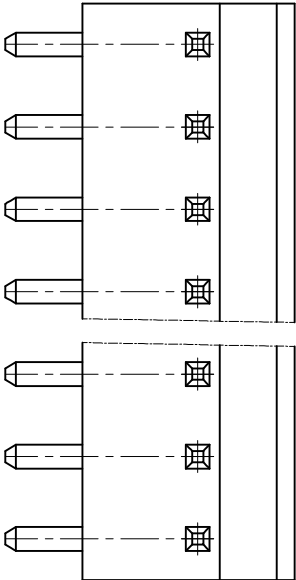

技术参数 (SPECIFICATIONS)

- ◆ 额定电压: 250V AC DC
- ◆ Voltage rating: 250V AC DC
- ◆ 额定电流: 5.0A AC DC MIN
- ◆ Current rating: 5.0A AC DC MIN
- ◆ 耐压值: 1500V AC/minute
- ◆ Withstand voltage: 1500V AC/minute
- ◆ 绝缘电阻: 1000MΩ MIN
- ◆ Insulation resistance: 1000MΩ MIN
- ◆ 接触电阻: 0.02Ω MAX
- ◆ Contact resistance: 0.02Ω MAX
- ◆ 工作温度: -25℃ ~ +85℃
- ◆ Working Temperature: -25℃ ~ +85℃
- ◆ 间距: 3.96 mm
- ◆ Pitch: 3.96 mm
- 材料 (MATERIAL)
- ◆ 外壳: 尼龙66
- ◆ Housing: PA66

PCB 寸法
PCB LAYOUT

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	TITLE:		
DRAWN	ZHIWEI.CHEN	2015.07.07	GP01-3960WR-NP		
CHECKED					
APPROVALS					
TOLERANCES ARE	30~0.15 10~0.30 5~10 ~5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	UNIT: mm	SCALE: 1:1
					PROJ. SHEET 1 OF 1

GEPU 歌普