


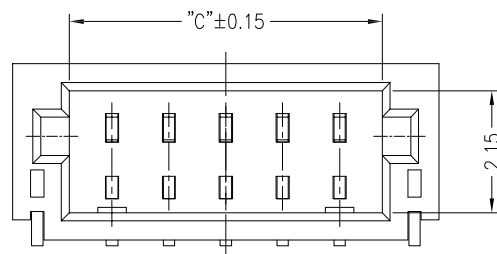
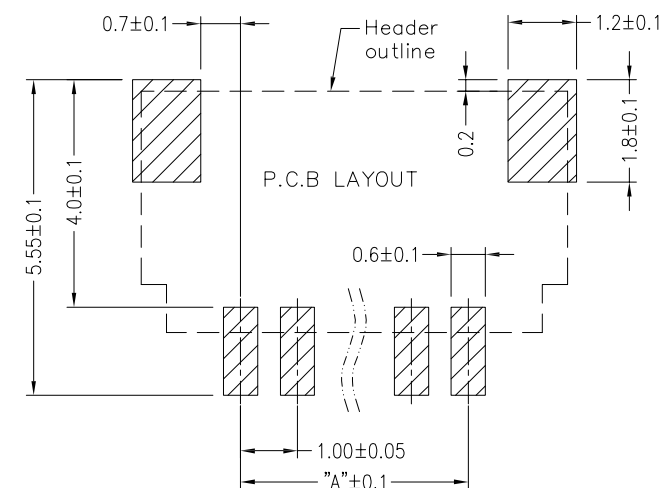


Poles	DIM. A	DIM. B	DIM. C
2P	1.0	4.5	2.6
3P	2.0	5.5	3.6
4P	3.0	6.5	4.6
5P	4.0	7.5	5.6
6P	5.0	8.5	6.6
7P	6.0	9.5	7.6
8P	7.0	10.5	8.6
9P	8.0	11.5	9.6
10P	9.0	12.5	10.6
11P	10.0	13.5	11.6
12P	11.0	14.5	12.6
13P	12.0	15.5	13.6
14P	13.0	16.5	14.6
15P	14.0	17.5	15.6
16P	15.0	18.5	16.6
17P	16.0	19.5	17.6
18P	17.0	20.5	18.6
19P	18.0	21.5	19.6
20P	19.0	22.5	20.6

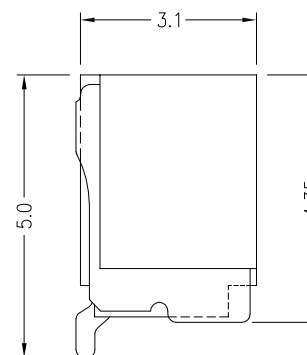

Assembly Layout

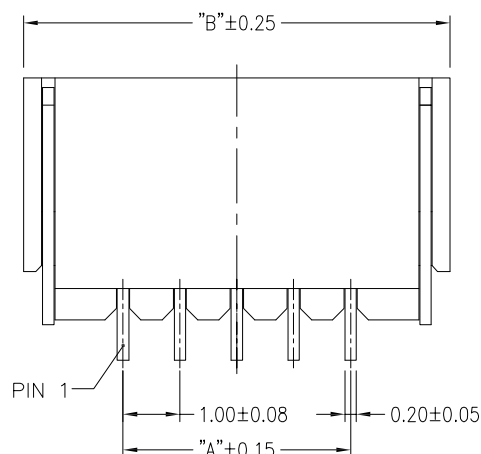

技术参数 SPECIFICATIONS

适用线规: AWG#28~#32

Applicable Wire: AWG#28~#32

额定电压: 50V DC/AC(rms)

Rated voltage: 50V DC/AC(rms)

额定电流: 1A (AWG #28)

Rated Current: 1A (AWG #28)

耐压值: 500V AC/minute

Withstand voltage: 500V AC/min.

工作温度: -25°C ~ +85°C

Working Temp: -25°C ~ +85°C

绝缘电阻: $\geq 100 \text{ M}\Omega$ Insulation resistance: $\geq 100 \text{ M}\Omega$ 接触电阻: $\leq 20 \text{ m}\Omega$ Contact resistance: $\leq 20 \text{ m}\Omega$

材料 MATERIAL

绝缘体: 尼龙9T, UL94-V0

Insulator: PA9T, UL94-V0

接触针: 磷铜

Contact PIN: Phosphor bronze

焊片: 磷铜

Solder tab: Phosphor bronze

APPROVALS		DATE	GEPU 歌普			
DRAWN	ZHIWEI.CHEN	2015.07.07				
CHECKED			TITLE:			
APPROVALS			PART NO. GP01-1001WRS-NP			
TOLERANCES ARE	30~以上	± 0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	10~30	± 0.20				
	5~10	± 0.15				
	~ 5	± 0.10	$\pm 2'$	DRAWING NO.		SHEET 1 OF 1

	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.