
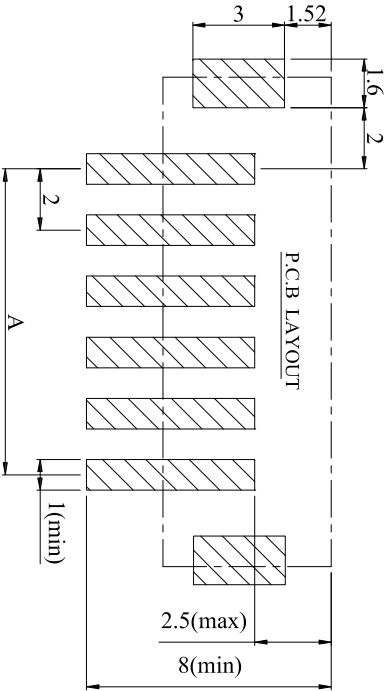
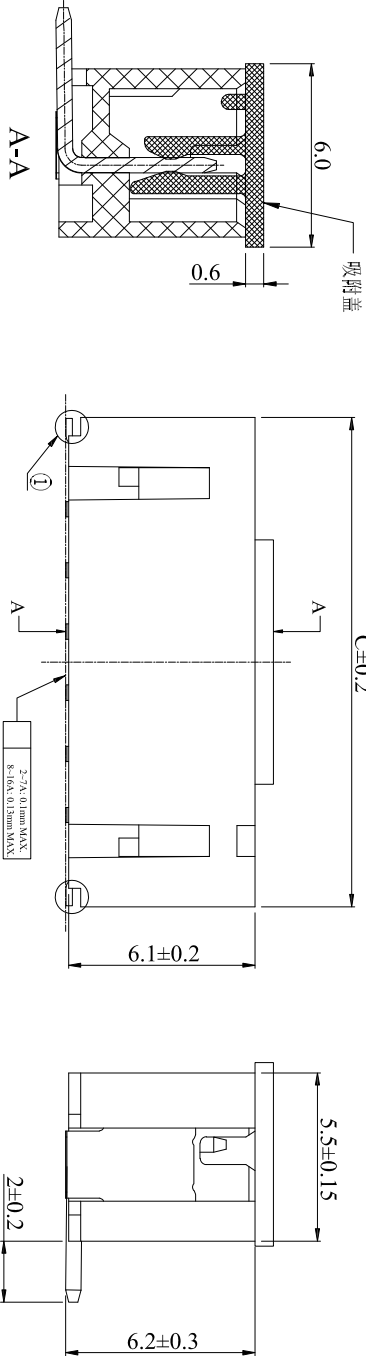


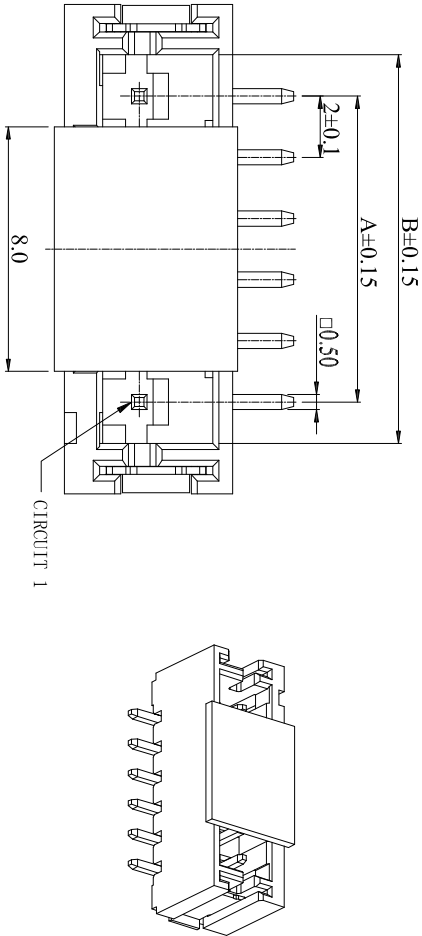

技术参数 (SPECIFICATIONS)

- 额定电压: 100V AC DC
- Voltage rating: 100V AC DC
- 额定电流: 2.0A AC DC(24AWG)
- Current rating: 2.0A AC DC(24AWG)
- 耐压值: 800V AC/minute
- Withstand voltage: 800V AC/minute
- 绝缘电阻: 1000MΩ MIN
- Insulation resistance: 1000MΩ MIN
- 接触电阻: 0.02Ω MAX(初始值)
- Contact resistance: 0.02Ω MAX(Initial)
- 工作温度: -25℃~+85℃
- Working Temperature: -25℃~+85℃
- 间距: 2.0 mm
- Pitch: 2.0 mm

材料 (MATERIAL)

- 绝缘体: 尼龙9T UL94V-0
- Insulator: PA9T UL94V-0
- 接触针: 黄铜镀锡
- Contact PIN: Brass Tin-plating
- 焊片: 磷铜镀锡
- Solder tab: Phosphor Bronze Tin-plating
- 盖子: 尼龙46 UL94V-0
- CAP: PA46 UL94V-0

POLES	P/N	A	B	C
2	2P 加盖	2.00	4.70	8.00
3	3P 加盖	4.00	6.70	10.00
4	4P 加盖	6.00	8.70	12.00
5	5P 加盖	8.00	10.70	14.00
6	6P 加盖	10.00	12.70	16.00
7	7P 加盖	12.00	14.70	18.00
8	8P 加盖	14.00	16.70	20.00
9	9P 加盖	16.00	18.70	22.00
10	10P 加盖	18.00	20.70	24.00
11	11P 加盖	20.00	22.70	26.00
12	12P 加盖	22.00	24.70	28.00
13	13P 加盖	24.00	26.70	30.00
14	14P 加盖	26.00	28.70	32.00
15	15P 加盖	28.00	30.70	34.00
16	16P 加盖	30.00	32.70	36.00

APPROVALS		DATE			
DRAWN	ZHIWEI.CHEN	2021.09.07			
CHECKED					
APPROVALS		TITLE:			
NEW		GP01-2001WVS-1NP			
ECN NO.	REV.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
TOLERANCES ARE		30~0.15	±0.30	ANGLE	PART NO.
		10~0.30	±0.20		UNIT: mm
		5~0.10	±0.15	±2°	SCALE: 1:1
		~ 5	±0.10		PROJ.
				DRAWING NO.	SHEET 1 OF 1

