
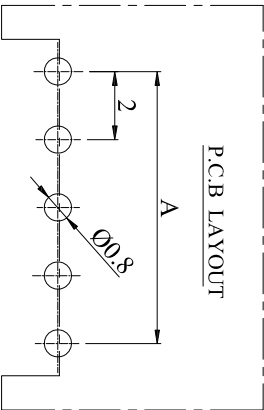
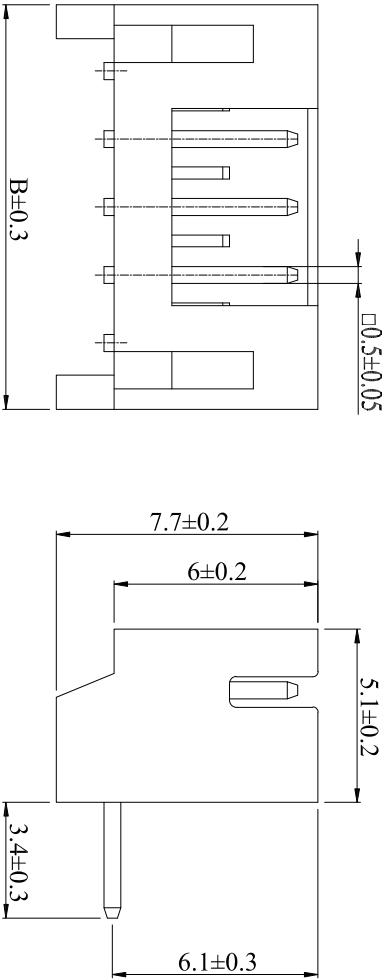
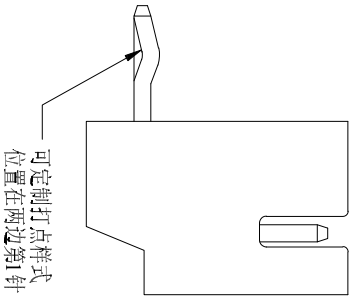


技术参数 (SPECIFICATIONS)

额定电压: 250V AC DC
Voltage rating: 250V AC DC
额定电流: 2.0A AC DC(24AWG)
Current rating: 2.0A AC DC(24AWG)
耐压值: 800V AC/minute
Withstand voltage: 800V AC/minute
绝缘电阻: 1000MΩ MIN
Insulation resistance: 1000MΩ MIN
接触电阻: 0.02Ω MAX(初始值)
Contact resistance: 0.02Ω MAX(Initial)
工作温度: -25°C~+85°C
Working Temperature: -25°C~+85°C
间距: 2.0 mm
Pitch: 2.0mm

材料 (MATERIAL)

绝缘体: 尼龙66 UL94V-0
Insulator: PA66 UL94V-0
接触针: 黄铜镀锡
Contact PIN: Brass TIN-Plating

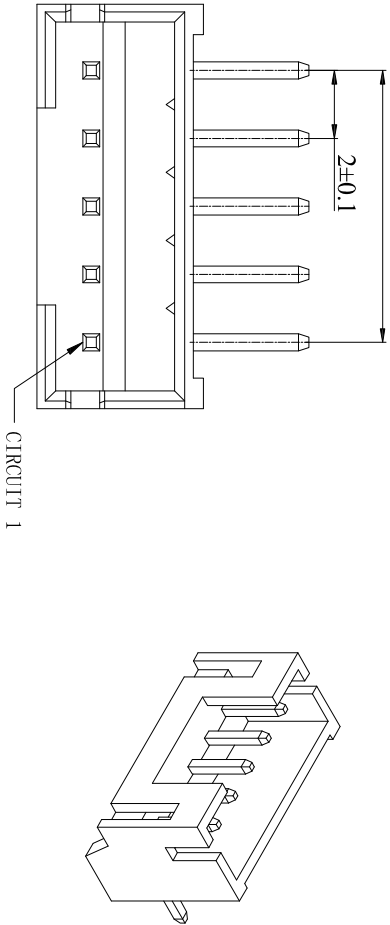

POLES	P/N	A	B
2	2P	2.0	6.1
3	3P	4.00	8.10
4	4P	6.00	10.10
5	5P	8.00	12.10
6	6P	10.00	14.10
7	7P	12.00	16.10
8	8P	14.00	18.10
9	9P	16.00	20.10
10	10P	18.00	22.10
11	11P	20.00	24.10
12	12P	22.00	26.10
13	13P	24.00	28.10
14	14P	26.00	30.10
15	15P	28.00	32.10
16	16P	30.00	34.10

APPROVALS		DATE		
DRAWN	ZHIWEI.CHEN	2021.09.07		
CHECKED			TITLE:	
APPROVALS			PART NO.	GP01-2001WR-NP-L
TOLERANCES ARE		30~0.1 10~0.3 5~10 ~5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE
CHANGE.	CHECK.	APPRO.	UNIT: mm	SCALE: 1:1
			DRAWING NO.	SHEET 1 OF 1

NEW

DESCRIPTION.

ECN NO.

REV.

DATE.

歌普 GEPU