
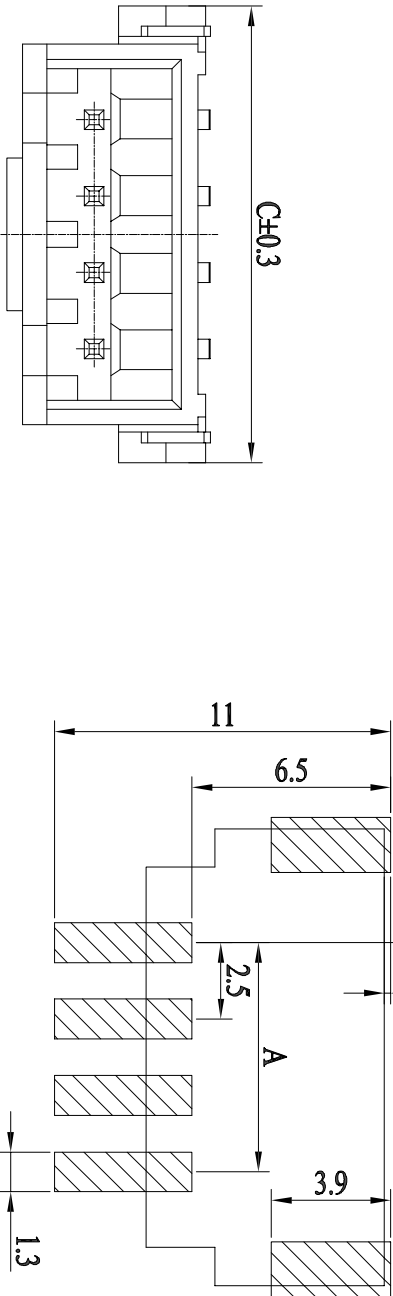


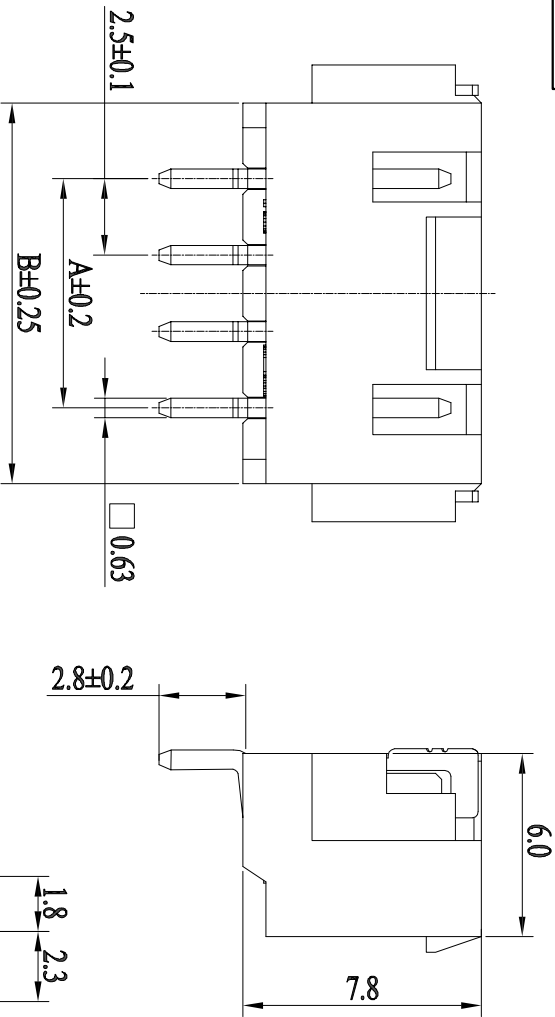

POB板安装尺寸

尺寸	2P	3P	4P	5P	6P	7P	8P	9P	10P	11P	12P	13P	14P	15P	16P
A	2.5	5.0	7.5	10.0	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0	32.5	35.0	37.5
B	7.5	10.0	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0	32.5	35.0	37.5	40.0	42.5
C	10.0	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0	32.5	35.0	37.5	40.0	42.5	45.0

技术参数 (SPECIFICATIONS)

- 额定电压: 250V AC DC
- Voltage rating: 250V AC DC
- 额定电流: 3.0A AC DC MAX
- Current rating: 3.0A AC DC MAX
- 耐压值: 1000V AC/minute
- Withstand voltage 1000V AC/minute
- 绝缘电阻: 1000MΩ MIN
- Insulation resistance: 1000MΩ MIN
- 接触电阻: 0.02Ω MAX
- Contact resistance: 0.02Ω MAX
- 工作温度: -25°C ~+85°C
- Working Temperature: -25°C ~+85°C
- 间距: 2.5 mm
- Pitch: 2.5mm

材料 (MATERIAL)

- 绝缘体: 尼龙9T UL94V-0
- Insulator: PA9T UL94V-0
- 接触针: 黄铜
- Contact PIN: Brass
- 焊片: 磷青铜
- Solder tab :: Phos. bronze

					APPROVALS		DATE		GEPU歌普 2.5MM卧式贴片带扣					
					DRAWN		ZHIWEI.CHEN						2015.07.07	
					CHECKED									
					APPROVALS									
											TITLE:		2.5MM卧式贴片带扣	
											PART NO.		GP01-2504WRS-NP	