
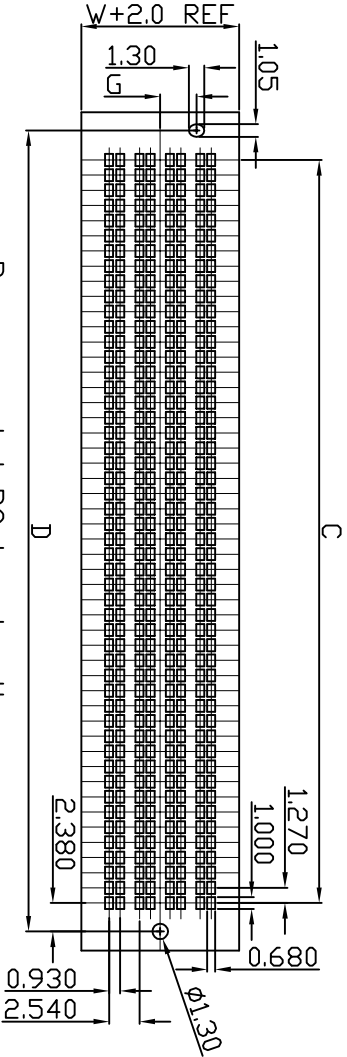
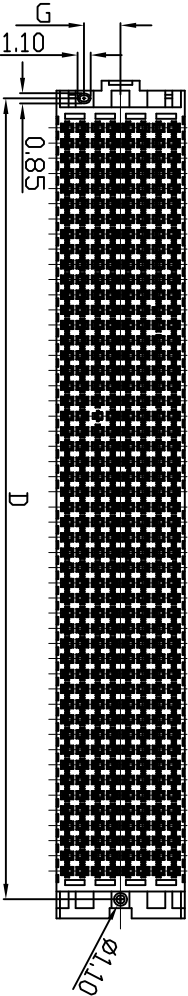
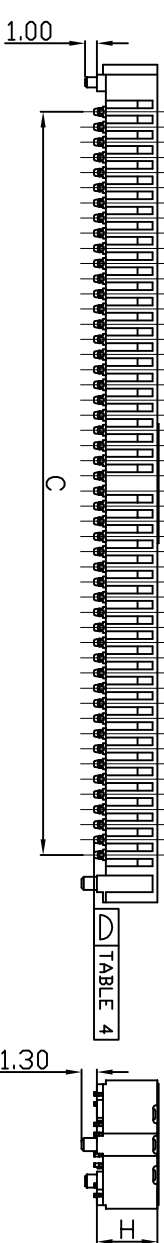


- SPECIFICATIONS
- 1.CURRENT RATING: 1.0A
 - 2.VOLTAGE RATING 240VAC
 - 3.OPERATING TEMPERATURE RANGE:-55°C TO +125°C
 - 4.OPERATING HUMIDITY RANGE:90% TO 95%.
 - 5.WITHSTANDING VOLTAGE:700V AC/MINUTE.

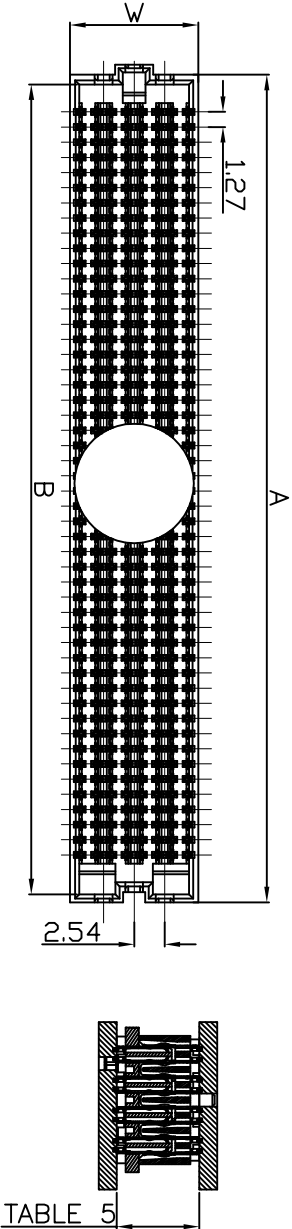


Recommended PC board pattern
(TOP VIEW)

TABLE 1	
HEIGHT	H
1	5.05
2	6.05
3	6.55
4	7.54

TABLE 5 STACK HEIGHT						
5.05	6.05	6.55	7.54			
4.72	7.00	8.00	8.50	9.50		
5.72	8.00	9.00	9.50	10.50		
6.22	8.50	9.50	10.00	11.00		
8.23	NA	NA	12.00	NA		
9.27	11.50	12.50	13.00	14.00		
9.70	12.00	13.00	13.50	14.50		
11.71	14.00	15.00	15.50	16.50		
13.72	16.00	17.00	17.50	18.50		

TABLE 2			TABLE 4		
ROWS	W	G	POSITION COPLANARITY		
4	5.66	2.01	10 PIN 0.15		
5 OR 6	8.20	3.05	30 PIN 0.20		
8	10.74	3.05	40 PIN 0.23		
10	13.28	3.05	50 PIN 0.23		
12	15.82	3.05			
14	18.36	3.05			

TABLE 3			
No OF ROWS	A	B	C
10	18.52	17.02	11.43
15	24.87	23.37	17.78
19	29.95	28.45	22.86
20	31.22	29.72	24.13
25	37.57	36.07	30.13
30	43.92	42.42	36.83
40	56.62	55.12	49.53
50	69.32	67.82	62.23

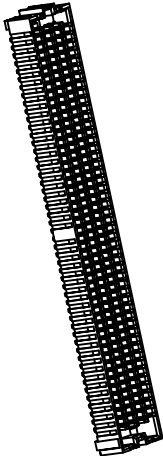

APPROVALS		DATE		TITLE	
DRAWN		ZHIWEI.CHEN		2015.07.07	
CHECKED					
APPROVALS				PART NO.	
TOLERANCES ARE		30~0.15 10~0.30 5~0.10		ANGLE	
~ 5		±0.10		±2°	
ECN NO.		REV.		DATE.	
NEW		CHANGE.		CHECK.	
DESCRIPTION.		APPRO.		DRAWING NO.	
				SCALE: 1:1	
				PROJ.	
				SHEET 1 OF 1	

GEPU 歌普